



WINTER-19 EXAMINATION

Subject Name: DESIGN OF STEEL & RCC STRUCTURES

Subject Code : 22502

Model Answer

Important Instructions to examiners:

- 1) The answers should be examined by key words and not as word-to-word as given in the model answer scheme.
- 2) The model answer and the answer written by candidate may vary but the examiner may try to assess the understanding level of the candidate.
- 3) The language errors such as grammatical, spelling errors should not be given more Importance (Not applicable for subject English and Communication Skills).
- 4) While assessing figures, examiner may give credit for principal components indicated in the figure. The figures drawn by candidate and model answer may vary. The examiner may give credit for any equivalent figure drawn.
- 5) Credits may be given step wise for numerical problems. In some cases, the assumed constant values
- 6) may vary and there may be some difference in the candidate's answers and model answer
- 7) In case of some questions credit may be given by judgement on part of examiner of relevant answer
- 8) For programming language papers, credit may be given to any other program based on equivalent concept.

QN		Attempt any FIVE of the following	Marking scheme	10 M
Q1	a)	Enlist the components and corresponding functions of steel water tank The components of a steel water tank are:- The side wall plates Bottom wall plates, bracings in case of rectangular tanks Elevated steel tank consists of, Ring beam, Staircase The primary functions of a steel water tank is storage of water	1 1	2
	b)	Define bolt value and pitch Pitch : it's the centre to centre distance between the bolts in the direction of force. Bolt value: it's the least value of the shear strength and bearing strength of a bolt	1 1	2
	c)	State the values of partial safety factors for material strength of concrete and steel for limit state of collapse The values of partial factor of safety for steel and concrete. 1) Partial factor of safety for steel = 1.15 2) Partial factor of safety for concrete = 1.5	1 1	2

OUR CENTERS :

KALYAN | DOMBIVLI | THANE | NERUL | DADAR

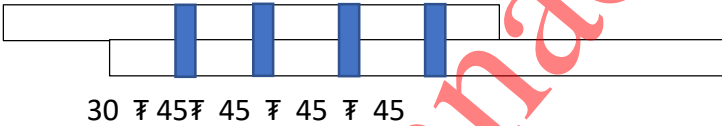
Contact - 9136008228

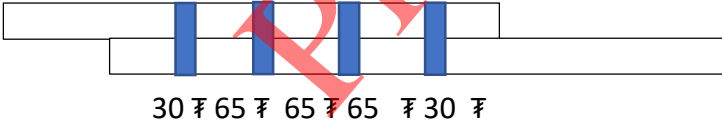


	d)	Write the expression for minimum shear reinforcement giving the meaning of the terms involved $S_v = \frac{0.87 f_y A_{sv}}{0.4 b}$ S _v – Spacing of stirrups f _y – Characteristic strength of steel, A _{sv} – Area of Stirrup bar, b – width of the beam	1 1	2
	e)	Define the aspect ratio in case of slab and state its importance. The ratio of L _y /L _x is know as aspect ratio of the slab, where L _y is longer side and L _x is the shorter side of the slab. The importance of this is that, if the ratio of L _y /L _x is greater than 2, then the should be designed as a one way slab and if the ratio is less than 2 it should be designed as a two way slab.	1 1	2
	f)	Write the two IS specifications for longitudinal reinforcement of an axially loaded short column IS specifications for longitudinal reinforcement of an axially loaded short column: i) Minimum diameter of bar in column = 12 mm ii) Minimum number of bars in square/rectangle column = 4 Nos iii) Minimum number of bars in circular column = 6 Nos iv) Cover of the column = 40 mm v) Minimum and maximum steel in column vi) Max % of steel = 6 % of gross cross-sectional area of column vii) Min % of steel = 0.8 % of gross cross-sectional area of column	1 M any2	2
	g)	Enlist two loads to be considered as per IS 875 -1987 while designing steel structure Loads to be considered as per IS 875 -1987 while designing steel structures 1. DEAD LOAD ----IS 875-PART-1 -1987 2. LIVE LOAD -- IS 875-PART-2 -1987 3. WIND LOAD --- IS 875-PART-3 -1987 4. SNOW LOAD --- IS 875-PART-4 -1987	1M any2	2
Q2		Attempt Any THREE of the following		12 M
	a)	Explain the limit state of serviceability applicable to steel structures. The acceptable limit for safety and serviceability of the structure before failure occurs is called as Limit state. To assure the serviceability of the	2	4 M



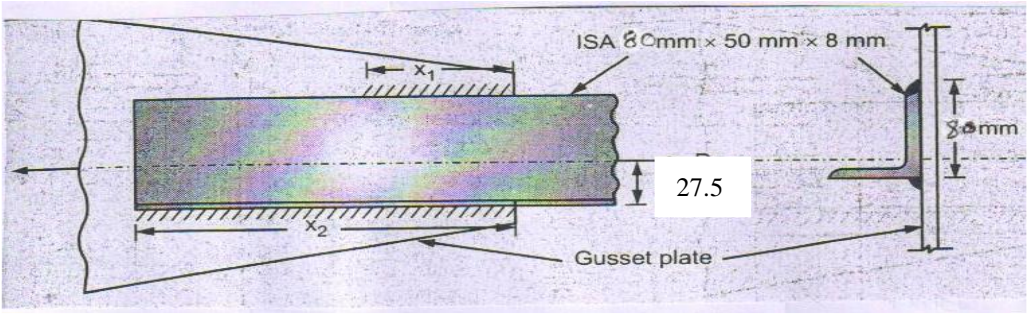
	<p>structure throughout its lifetime, it is related to the satisfactory performance of the structure at working load.</p> <p>The following limit state of serviceability is considered:</p> <ol style="list-style-type: none"> 1) Deflection and deformation 2) Durability 3) crack due to fatigue 4) Fire 	2	
b)	<p>In steel constructions bolts of grade 4.6 are generally used. What do you mean by grade 4.6?</p> <p>In bolts of grade 4-6, The number 4 is $1/100^{\text{th}}$ of nominal ultimate stress of bolt $f_{ub} = 4 \times 100 = 400 \text{ N/mm}^2$ and yield stress f_{yb} is $0.6 \times 400 = 240 \text{ N/mm}^2$</p>	2 2	4 M
c)	<p>Define over reinforced sections and state two reasons due to which they are avoided.</p> <p>When $x_u > x_{max}$ or $p_t > p_{t \text{ lim}}$ The section is called a over reinforced section, It is avoided due to the following reasons:</p> <ol style="list-style-type: none"> 1) In over reinforced section, percentage of steel is more than critical percentage, Due to this, the concrete crushes and reaches its ultimate stress before steel reaches its yield point . In this case, the beam will fail initially due to overstress in the concrete, suddenly without giving any warning by way of large deformations and cracks as it does in the case of under reinforced section. So, there is a huge loss of life and property. 2) The moment of resistance of the section does not increase more than that of balanced section even if the steel is increased as compared to balanced section 	2 2	4 M
d)	<p>Diameter of steel bar is 20 mm. Use Fe415 steel and design bond stress is 1.2 MPa. For plain bars in tension. Find development length in tension and compression.</p> <p>$d = 20 \text{ mm}$ $f_y = 415 \text{ N/mm}^2$ $\tau_{bd} = 1.2 \text{ N/mm}^2$</p> <p>Development Length is given by</p> $L_d = \left(\frac{0.87 f_y \phi}{4 \tau_{bd}} \right)$ <p>For deformed bars, $\tau_{bd} = 1.2 * 1.6$</p> <p>In tension</p> $L_d = \left(\frac{0.87 * 415 * 20}{4 * 1.6 * 1.2} \right)$ <p>= 940.23 mm</p>	1 1 1	4 M

	<p>Assuming $e = 1.5d_o$ $= 1.5 \times 20 = 30\text{mm}$ $P = 2.5d = 45\text{ mm}$ $\frac{30}{3 \times 20} = 0.5$, $\left(\frac{45}{3 \times 20} - 0.25\right) = 0.5$, $\frac{400}{415} = 0.964, 1.0$</p> <p>The least of the above is 0.5 hence k_b is 0.5 $V_{npb} = 2.5 \times 0.5 \times 18 \times 10 \times 415$ $= 93375\text{ N}$ $V_{dpb} = \frac{V_{npb}}{1.25} = \frac{93375}{1.25} = 74700\text{N} \quad 74.70\text{kN}$</p> <p>Bolt value is the least of the above V_{dsb} & V_{dpb} $= 36.67\text{ kN}$ No. of bolts = $\frac{120}{36.67} = 3.27 \approx 4\text{ No's}$, Arrange the bolts as shown below in one row.</p>  <p style="text-align: center;">30 ∇ 45 ∇ 45 ∇ 45 ∇ 45</p> <p style="text-align: center;">Alternatively</p> <p>Single shear strength of bolt $V_{dsb} = \frac{V_{nsb}}{\gamma_{m1}}$ $V_{nsb} = \frac{f_{ub}}{\sqrt{3}}(n_n.A_{nb} + n_s.A_{sb})$ $= \frac{400}{\sqrt{3}}(1 \times 198.49 + 0)$ $= 45838.33\text{N}$ $V_{dsb} = \frac{45838.33}{1.25} = 36670.67\text{N}$ $V_{dsb} = 36.67\text{ kN}$ Therefore no of bolts: $\frac{120}{36.67} = 3.27 \approx 4\text{ No's}$</p> <p>Equating this to tensile strength of plate per pitch length $T_{dn} = (0.9 * f_u(p - d_o) * t) / \gamma_{m1} = \frac{0.9 \times 415(p-20) \times 10}{1.25} = 120000$</p>	<p style="text-align: center;">1</p> <p style="text-align: center;">1</p> <p style="text-align: center;">1</p> <p style="text-align: center;">1</p> <p style="text-align: center;">1</p> <p style="text-align: center;">1</p> <p style="text-align: center;">1</p>	
--	--	--	--

	<p>$p = 60.16\text{mm} \sim 65 \text{ mm}$ check if greater than minimum pitch which is $2.5 \times 18 = 45$ mm hence ok</p> <p>Consider e as 35 mm</p> <p>Strength of bolts in bearing</p> $V_{dpb} = \frac{V_{nsb}}{\gamma_{m1}}$ <p>$V_{npb} = 2.5kb.d.t.f_u$</p> <p>K_b is least of the below</p> $\left[\frac{e}{3d_o}, \frac{P}{3d_o} - 0.25, \frac{f_{ub}}{f_u}, 1.0 \right]$ $\frac{35}{3 \times 20} = 0.583, \left(\frac{65}{3 \times 20} - 0.25 \right) = 0.833, \frac{400}{415} = 0.964, 1.0$ <p>Hence the value of k_b is 0.583</p> <p>$V_{npb} = 2.5 \times 0.583 \times 18 \times 10 \times 415$ $= 108875.25 \text{ N}$</p> $V_{dpb} = \frac{V_{npb}}{1.25} = \frac{108875.25}{1.25}$ $= 87100.2 \text{ N}$ $= 87.1 \text{ kN}$ <p>Therefore, the bolt value is 36.6kN</p>  <p style="text-align: center;">30 ₹ 65 ₹ 65 ₹ 65 ₹ 30 ₹</p>	<p>1</p> <p>1</p> <p>1</p>	
--	--	----------------------------	--



	<p>b) Design a suitable fillet welded connection for ISA 80x50x8 with its longer leg connected to gusset plate of thickness 8mm. The angle is subjected to factored load of 270kN. $C_{xx} = 27.5\text{mm}$. Assume weld applied to all 3 edges and shop weld. Take $f_y = 250\text{ MPa}$ & $f_u = 410\text{ MPa}$.</p> <p>Given $P_u = 270\text{ kN}$ Minimum size of weld = 3 mm Maximum size of weld = $\frac{3}{4}(8) = 6\text{mm}$ Provide a weld size of 4 mm.</p> <p>Note: - Students may assume any other size of weld between 3 mm to 6 mm. The answer will vary examiner needs to check as per the size of weld considered by the student.</p> <p># Design stress of shop weld. $f_{wd} = \frac{f_u}{(\sqrt{3}) * \gamma_{m1}} = 189.37\text{ N/mm}^2$ $\gamma_{m1} = 1.25$ Throat thickness (t) = $0.7 \times 4 = 2.8\text{ mm}$.</p> <p># Weld length required</p> $P_{dw} = f_{wd} * L * t$ $270 \times 10^3 = 189.37 * L * 2.8$ $L = 509.21\text{ mm. } \sim 510\text{mm}$ <p style="text-align: center;">Alternatively</p> <p>#Strength of weld per mm $P_{dw} = f_{wd} * 1 * t$ $P_q \times 189.37 \times 1 \times 2.8$ $P_q = 530.24\text{ N}$ $\text{Length of weld required} = \frac{270 * 10^3}{530.24}$ $= 509.21 \approx 510\text{ mm}$</p>	<p>1</p> <p>1</p> <p>1</p> <p>1</p> <p>or</p> <p>1</p>	<p>6M</p>
--	--	--	------------------

	<p>As per the requirement the welding is done on 3 sides</p> $X1 + X2 + 80 = 510$ $X1 + X2 = 430$  <p>Taking moment @ bottom weld</p> $X1(530.24) * 80 + 80 * 530.24 * 40 = 270 * 10^3 * 27.5$ $X1 = 135.04 \approx 140 \text{ mm}$ $X2 = 294.96 \approx 295 \text{ mm}$	<p>1</p> <p>1</p>	
<p>c)</p>	<p>A RC section 250mm x 450mm effective in reinforced with 4 no – 16 mm dia bars of Fe 415 on tension side only. If M20 concrete in used, calculate ultimate moment of resistance the beam can offer.</p> <p>Size of beam = 250 x 450</p> <p>Given $A_{st} = 4 \left[\frac{\pi}{4} \times 16^2 \right] = 804.25 \text{ mm}^2$</p> <p>Check it the beam is under reinforced</p> $X_u = \frac{0.87 f_y A_{st}}{0.36 f_{ck} b}$ $X_u = \frac{0.87 \times 415 \times 804.25}{0.36 \times 20 \times 250} = 161.32 \text{ mm}$ <p>Check X_u max</p> $X_{u \max} = 0.48d = 0.48 \times 450 = 216 \text{ mm}$ <p>Since $X_u < X_{u \max}$ section is under reinforced</p> $MR = 0.87 f_y A_{st} (d - 0.42 X_u)$ $= 0.87 \times 415 \times 804.25 (450 - 0.42 \times 161.32)$ $= 110994360 \text{ N-mm}$ $MR = 110.99 \text{ kN-m}$	<p>1</p> <p>1</p> <p>1</p> <p>1</p> <p>1</p>	<p>6M</p>



Q4	Attempt any TWO of the following		12M
	<p>a) Calculate depth and area of steel at mid span of a simply supported beam over a clear span 6m. The beam is carrying all-inclusive load 20 kN/M. Assume 300mm bearings. Use M20 & Fe500 Assume $b = \frac{1}{2} d$</p> <p>Beam load = 20 kN/m Span of beam = 6m. $f_{ck} = 20 \text{ N/mm}^2$ $f_y = 500 \text{ N/mm}^2$</p> <p>Effective span $L_e = 6 + \frac{0.3}{2} + \frac{0.3}{2} = 6.3m.$</p> <p>BM for simply supported beam = $\frac{wl^2}{8} = \frac{20 \times 6.3^2}{8} = 99.23 \text{ kNM}$ Factored BM = $1.5 \times 99.23 = 148.84 \text{ kNM}$</p> <p>Equate Factored BM to M_{ulim} to calculate b & d</p> <p>$M_{ulim} = 0.133 \times f_{ck} \times b \times d^2$</p> <p>As $b = \frac{1}{2} d$</p> <p>Calculate effective depth d and width b</p> <p>$M_{ulim} = 0.133 f_{ck} \frac{d^3}{2}$</p> <p>$148.84 \times 10^6 = 0.133 \times 20 \times \frac{d^3}{2} = 481.89 \text{ mm} \approx 490 \text{ mm}.$</p> <p>take effective cover = 40 , therefore Overall Depth $D = d + d^1 = 490 + 40 = 530 \text{ mm}.$</p> <p>As $b = \frac{d}{2}$ $b = \frac{490}{2} = 245 \text{ mm}.$</p> <p>Area of steel</p> <p>$A_{st} = \frac{0.5 \times f_{ck}}{f_y} \left[1 - \sqrt{1 - \frac{4.6 M_{ulim}}{f_{ck} b d^2}} \right] b d$</p>	<p>1</p> <p>1</p> <p>1</p> <p>1</p>	



	$= \frac{0.5 \times 20}{500} \left[1 - \sqrt{1 - \frac{4.6 \times 148.84 \times 10^6}{20 \times 245 \times 490^2}} \right] 245 \times 490 = 848.6 \text{ mm}^2$ <p>No. of bars to be provided if dia of bars is 20mm. Area of one bar = $\frac{\pi}{4} \times 20^2 = 314.16 \text{ mm}^2$</p> <p>No. of bars = $\frac{A_{st}}{\text{Area of one bar}} = \frac{848.6}{314.16} = 2.7 \approx 3 \text{ No's}$</p> <p style="text-align: center;">Alternatively,</p> <p>A_{st} can also be determined as</p> <p>$Pt, \lim = \frac{A_{st}}{bd} * 100$</p> <p>Pt,lim for Fe500 = 0.038*20 = 0.76%</p> <p>$A_{st} = \frac{0.76 * b * d}{100} = \frac{0.76 * 245 * 490}{100} = 912.38 \text{ mm}^2$</p> <p>No. of bars to be provided if dia of bars is 20mm. Area of one bar = $\frac{\pi}{4} \times 20^2 = 314.16 \text{ mm}^2$</p> <p>$\frac{912.38}{314.16} = 2.9 \approx 3 \text{ No's.}$</p>	1	
		1	
		Or	
		1	
		1	
b)	<p>A simply supported beam of span 5m carries a working udl of intensity 40 kN/m. Size of beam 350 x 500mm (effective). It is reinforced with 4 bars 20mm diameter. Design 8mm diameter 2 legged stirrups if one 20 mm diameter bar is bent up. Take $\tau_c = 0.5 \text{ N/mm}^2$ $\tau_{c \max} = 2.8 \text{ N/mm}^2$ Use M20 grade & Fe415 steel.</p> <p>Span = 5m $w = 40 \text{ kN/m}$ Size of beam = 350 x 500 mm effective $\tau_c = 0.5 \text{ N/mm}^2$ $\tau_{c \max} = 2.8 \text{ N/mm}^2$ #Calculation of shear force Factored load = $1.5 \times 40 = 60 \text{ kN/m}$</p>	1	6M



	<p>Factored shear force (V_u) = $\frac{wd \cdot l}{2} = \frac{60 \cdot 5}{2} = 150 \text{ kN}$</p> <p># Calculate Shear stress τ_v</p> <p>$\tau_v = \frac{V_u}{bd} = \frac{150 \times 10^3}{350 \times 500} = 0.857 \text{ N/mm}^2$ $< \tau_{c \text{ max}}$ hence OK</p> <p>τ_c value is 0.5</p> <p>Check if shear reinforcement is required</p> <p>As $\tau_v > \tau_c$ Shear reinforcement is required</p> <p>Calculation of Balance shear</p> <p>$V_{us} = V_u - \tau_c \times b \times d$ $= 150 \times 10^3 - 0.5 \times 350 \times 500 = 62500 \text{ N.}$</p> <p>Area of bent up bar = $[\frac{\pi}{4} \times 20^2] \times 1 = 314.16 \text{ mm}^2$</p> <p>Assuming 45° bend</p> <p># Shear resisted by Bent-up bar</p> <p>$V_{usb} = \text{shear resisted by bent-up bar}$ $= 0.87 \times f_y \times A_{sb} \times \sin 45$ $= 0.87 \times 415 \times 314.16 \times \sin 45 = 80205.33 \text{ N}$</p> <p>$V_{usb} > \frac{V_u}{2}$ hence OK.</p> <p># Shear Resisted by vertical shear stirrups will be</p> <p>$V_{usv} = \frac{V_u}{2} = 31.25 \text{ kN}$</p> <p>For two legged vertical stirrups $A_{sv} = \frac{2 \cdot \pi \cdot 8^2}{4} = 100.53 \text{ mm}^2$</p> <p>$S = \frac{0.87 \cdot f_y \cdot A_{sv} \cdot d}{V_{usv}}$ $= \frac{0.87 \times 415 \times 100.53 \times 500}{31.25 \times 10^3} = 580.74 \text{ mm}$</p> <p>Maximum spacing is given as 300 mm $0.75d = 0.75 \times 500 = 375 \text{ mm}$ 580.74 mm</p> <p>Least value of the above is 8 mm stirrups @ 300 mm c/c</p> <p style="text-align: center;">Alternatively</p> <p>Check for minimum stirrups if capable of taking the shear force resisted by minimum stirrups</p> <p>$V_{usv} (\text{min}) = 0.4 \times b \times D = 70 \text{ kN} > V_{usv}$</p> <p>Minimum stirrups are sufficient</p> <p>$A_{sv} = \frac{2 \cdot \pi \cdot 8^2}{4} = 100.53 \text{ mm}^2$</p>	<p>1</p> <p>1</p> <p>1</p> <p>1</p> <p>1</p> <p>OR</p>	
--	--	--	--



	<p>$= \frac{3000}{20 \times 1.4} = 107.14 \text{ mm}$</p> <p>Assuming 10 mm ϕ main bars and nominal cover of 20 mm [Note: some student may assume 15mm cover] $D = d + \text{cover} + \phi / 2$ $= 107.14 + 20 + 10/2$ $= 132.14\text{mm}$ Take $D = 135\text{mm}$ $d_{\text{avail}} = D - \text{cover} - \phi / 2$ $135 - 20 - 10/2$ $d = 110\text{mm}$ Effective span $l_e = l + d = 3000 + 110 = 3110\text{mm}$ $l_e = 3.11\text{m}$ #Calculation of Loads $Dl = 0.135 \times 25 = 3.375 \text{ KN/m}^2$ $LL = 4 \text{ KN/m}^2$ $FF = 1 \text{ KN / m}^2$</p> <hr/> <p>$W = 8.375 \text{ KN m}^2$ The load is to be considered for one meter $8.375 * 1 = 8.375$ Factored Load (w_d) = $8.375 \times 1.5 = 12.563 \text{ KN/ m}$</p> <p># Factored max BM $M_d = w_d \times l_e^2 / 8$ $M_d = \frac{12.563 \times 3.11^2}{8} = 15.19 \text{ kN-m}$</p> <p>#Check for required depth $d = \text{SQRT}(15.19 \times 10^6 / 0.138 \times 20 \times 1000)$ $d = 74.19\text{mm}$ $d_{\text{avail}} = 110\text{mm} > d_{\text{reqd}} \therefore \text{ok}$ Provide $D = 135\text{mm}$ $d_{\text{avail}} 110\text{mm}$</p> <p>#Area of main steel and its spacing</p> $A_{st} = 0.5 f_{ck} / f_y \left[1 - \sqrt{1 - \frac{4.6 M_d}{f_{ck} b d^2}} \right] \times b d$ $= 0.5 \times 20 / 415 \left[1 - \sqrt{1 - \frac{4.6 * 15.19 * 10^6}{20 * 1000 * 110^2}} \right] * 1000 * 110 = 415.18\text{mm}^2$	<p>1</p> <p>1</p> <p>1</p> <p>1</p>	
--	---	-------------------------------------	--



	<p>Spacing of main reinforcement Assuming 10 mm bar. $A\phi = \pi \times 10^2/4 = 78.5\text{mm}^2$ Spacing = $1000 \times A\phi/A_{st}$ $= 1000 \times 78.5/415.18$ $= 189.17\text{mm}$ $= 180\text{mm c/c}$ Check for spacing = $3d$ or 300mm $= 330$ or 300mm Provide 10 mm bar at 180mm c/c</p>	<p>Spacing of main reinforcement Assuming 8 mm bar $A\phi = \pi \times 8^2/4 = 50.26\text{mm}^2$ $= \text{Spacing} = 1000A\phi/A_{st}$ $= 1000 \times 50.26/415.18$ $= 121.06\text{mm}$ $= 120 \text{ mm c/c}$ Check for spacing = $3d$ or 300mm $= 330$ or 300mm Provide 8mm bar at 120mm c/c</p>	1	
	<p>#Area and spacing of distribution steel $A_{sd} = 0.12/100 \times bD$ $= 0.12/100 \times 1000 \times 135 = 162\text{mm}^2$ Spacing 8mm bars $A\phi = 50.26\text{mm}^2$ $S_d = 1000 \times A\phi/A_{sd}$ $1000 \times 50.26/ 162 = 310\text{mm}$ Check for spacing minimum of 1) $5d = 5 \times 110 = 550\text{mm}$ 2) 450mm 3) 310mm Provide distribution steel of 8mm at 310mm c/c</p>		1	
b)	<p>Design a reinforced concrete slab panel for 6.3 x 4.5 m simply supported on all the four sides. It has to carry a live load of 4 kN/m² in addition to its dead load. Use M25concrete Fe 415 steel. (No checks) Use $\alpha_x = 0.062$ & $\alpha_y = 0.060$. $L_y = 6.3\text{m}$ $L_x = 4.5\text{m}$ $L_y/L_x = 6.3/4.5 = 1.4 < 2$: Two way slab Note: student may assume different MF, to be checked as per the values taken Assume MF = 1.4 $d = \text{Span}/20 \times 1.4$ $= 160.71\text{mm}$ Assume clear over of 20mm Assume 10mm diameter of bar $D = d + \text{cover} + \phi/2$ $= 160.71 + 20 + 10/2 = 185.71 = 190\text{mm}$ $d_{\text{avail}} 190-20-10/2 = 165\text{mm}$</p> <p>#Calculation of effective span</p>			6M



	<p>Lex = 4500+165 =4665mm</p> <p>#Calculation of Loads</p> <p>Self weight of slab $0.19 \times 25 = 4.75\text{KN/m}^2$</p> <p>Live Load = 4KN/m^2</p> <p>w = 8.75KN/m^2</p> <p>Factored Load (wd) = 8.75×1.5 = 13.125KN/m^2</p> <p>Consider the loads for 1 m strip hence the loads will be 13.125KN/m</p> <p>#Bending Moment Calculation</p> <p>$M_x = \alpha_x * w_d * L_{ex}^2$ = $0.062 * 131.25 * 4.6652 = 17.71\text{KNm}$</p> <p>$M_y = \alpha_y * w_d * L_{ex}^2$ $0.060 * 13.125 * 4.6652 = 17.14\text{KNm}$</p> <p>#Check for Depth</p> <p>Effective depth of slab</p> $d_{reqd} = \sqrt{\frac{M}{qfckb}} = \sqrt{\frac{17.71 * 10^6}{0.138 * 25 * 1000}} = 71.65\text{mm}$ <p>davail = 165mm > dreqd , Hence OK</p> <p>Area & spacing of steel</p> $A_{stx} = 0.5 f_{ck}/f_y \left[1 - \sqrt{1 - \frac{4.6 * 17.71 * 10^6}{25 * 1000 * 165^2}} \right] 1000 * 165 = 306.91 \text{ mm}^2$ <p>Ast min = $0.12/100 \times 1000 \times 190 = 228\text{mm}^2$</p> <p>Astx > Astmin OK</p> <p>Spacing using 8mm bars ($A\phi = 50.26\text{mm}^2$)</p> $S_x = A\phi b/A_{stx} = 50.26 \times 1000/306.91 = 163.76\text{mm} = 160\text{mm}$ <p>Check for spacing</p> <p>S should be min of</p> <p>$3d = 3 \times 165 = 495\text{mm}$, 300 mm, S = 160mm</p> <p>Provide 8mm ϕ bars or 160mm c/c</p> $A_{sty} = 0.5f_{ck}/f_y \left[1 - \sqrt{1 - \frac{4.6M_y}{f_{ck}bd^2}} \right] bd$ $= 0.5 \times 25/415 \left[1 - \sqrt{1 - \frac{4.6 \times 17.14 \times 10^6}{25 \times 1000 \times 165^2}} \right] \times 1000 \times 165 = 296.71 \text{ mm}^2$ <p>Ast min = 228mm^2</p>	<p>1</p> <p>1</p> <p>1</p> <p>1</p> <p>1</p> <p>1</p>	
--	--	---	--



	<p>Asty > Astmain : OK</p> <p style="text-align: center;">Alternatively</p> <p>D= 165 – 8 = 157</p> $\text{Asty} = 0.5f_{ck}/f_y \left[1 - \sqrt{1 - \frac{4.6Md}{f_{ck}bd^2}} \right] bd$ $= 0.5 \times 25/415 \left[1 - \sqrt{1 - \frac{4.6 \times 17.14 \times 10^6}{25 \times 1000 \times 157^2}} \right] * 1000 * 157 = 312.87 \text{ mm}^2$ <p>Check for spacing</p> <p>$S_x = A\phi b/\text{Asty} = 50.26 \times 1000/296.71 = 169.39\text{mm} = 165\text{mm}$</p> <p>Spacing should be min of 3d = 495mm, 300, 160 min</p> <p>S = 160mm</p> <p>Provide 8mm at 165mm c/c</p>	1	
c)	<p>Design a cantilever chajja with following data: Span = 1.50 m, width = 2.0 m, 1.1. = 1.5 kN/m². Floor finish = 0.5 kN/m², support lintel = 230 x 300 mm concrete M20, Fe 415 steel, sketch the c/s of chajja. Showing steel details.</p> <p>Lx = 1.5m</p> <p>LL = 1.5KN / m²</p> <p>FF = 05KN / m²</p> <p>fck = 20N / mm²</p> <p>fy = 415 N/ mm²</p> <p>d = span / (7 x MF)</p> <p>Assuming MF = 1.4</p> <p># Estimation of depth</p> <p>d= 1500/(7 x 1.4) = 153.06mm</p> <p>Assuming 20mm cover and 10mm bars</p> <p>D = 153.06+20+10/2</p> <p>= 178.06 = 180mm</p> <p>davail = 180 - 20-10/2 = 155mm</p> <p>Effective Span</p> <p>le= l + d/2</p> <p>= 1500+155/2 = 1577.5mm =1.58m</p> <p>#Load Calculation & BM</p> <p>DL = 1x1 x 0.19 x 25 = 4.75KN/m²</p> <p>LL = 1.5KN/m²</p> <p>FF = 0.5KN/m²</p> <p>Total Load w= 6.75KN/m²</p> <p>Factored Load wd = 6.75 x 1.5 = 10.13KN/m²</p> <p>#Factored BM</p> $\text{Md} = \frac{wd \times le^2}{2}$	1 1	6M



	<p>$= (10.13 \times 1.58^2)/2 = 12.64\text{KN-m}$</p> <p># Required Depth</p> <p>$0.138 f_{ck}bd^2 = Md$</p> <p>$d_{req} = \sqrt{\frac{12.64 \times 10^6}{0.138 \times 20 \times 1000}} = 67.67\text{mm}$</p> <p>$d_{avail} = 155\text{mm} > d_{reqd} \therefore \text{OK}$</p> <p>Area and spacing of main steel</p> <p>$A_{st} = 0.5f_{ck}/f_y \left[1 - \sqrt{1 - \frac{4.36 Mu}{qf_{ck}bd^2}} \right] bd$</p> <p>$= 0.5 \times 20/415 \left[1 - \sqrt{1 - \frac{4.6 \times 12.64 \times 10^6}{20 \times 1000 \times 155^2}} \right] \times 1000 \times 155 = 233.26\text{mm}^2$</p> <p>$A_{stmin} = 0.12/100 \times b \times D$ $= 0.12/100 \times 1000 \times 190$ $= 228\text{mm}^2$</p> <p>$A_{st} > A_{stmin} \therefore \text{OK}$</p> <p>Spacing using 8mm bars ($A\phi = 50.26\text{mm}^2$)</p> <p>$S_x = A\phi b/A_{st} = 1000 \times 50.26 / 233.26 = 215.47\text{mm} \approx 215\text{mm}$</p> <p>Check for spacing S is minimum of $3d = 3 \times 155 = 465\text{mm}$, 300mm, $S = 215\text{mm}$</p> <p>Hence provide 8mm at 215mm c/c</p> <p>#Area of spacing of distribution steel</p> <p>$A_{std} = 0.12/100 \times bD$ $= 0.12/100 \times 1000 \times 190 = 228\text{mm}^2$</p> <p>Using 8mm bar ($A\phi = 50.26\text{mm}^2$)</p> <p>Spacing = $1000 \times A\phi / A_{std}$ $= 1000 \times 50.26/228$ $= 220.438\text{mm}$ $= 220\text{mm}$</p> <p>Spacing Should be minimum of $5d = 5 \times 155 = 775\text{mm}$, 450mm, 220mm Provide 8mm at 220mm c/c</p>	<p>1</p> <p>1</p> <p>1</p>	
--	--	----------------------------	--



	<p>#Check D should not be less than $0.12 L = 0.12 \times 3500$ = 420 mm – ok D should not be less than 400 mm – ok</p> <p>#Check for minimum eccentricity</p> $e_{min} = \frac{L}{500} + \frac{D}{30}$ $= \frac{3500}{500} + \frac{450}{30}$ $= 22 \text{ mm}$ $e_{max} = 0.05 \times D$ $= 0.05 \times 450$ $= 22.5 \text{ mm}$ <p>$e_{min} < e_{max}$ – ok</p> <p>#Main steel Calculation</p> $A_{sc} = 0.01 A_g$ $= 0.01 (450^2)$ $= 2025 \text{ mm}^2$ <p>Provide 8 bars of 20 mm diameter</p> <p>#Transverse Steel</p> <p>a) Diameter $\phi T = 1/4 \times \phi L$ or 6mm whichever is greater = $(1/4) 20$ or 6mm = 5mm or 6mm Use 6mm diameter mild steel reinforcement</p> <p>b) Spacing__ Min of the following</p> <ol style="list-style-type: none"> 1) D = 450mm 2) $16 \times \phi L = 16 \times 20 = 320\text{mm}$ 3) 300mm <p>Use 6mm ϕ links at 300 mm c/c</p>	<p>1</p> <p>1</p> <p>1</p> <p>1</p>	
b)	<p>Design a circular column to carry an axial load of 1500 kN. using MS Lateral ties. Use M25 concrete and Fe415 steel. The unsupported length of column is 3.75 m.</p> <p>P = 1500 KN Factored load = $1500 \times 1.5 = 2250\text{KN}$</p> <p>$f_{ck} = 25 \text{ N/mm}^2$ $f_y = 415 \text{ N/mm}^2$ $L_o = 3.75 \text{ m}$</p> <p>Assume 1 % of A_g.</p> <p>Note: Students may assume different % of steel, to be checked based on student assumption.</p>	<p>1</p>	<p>6M</p>



	<p>Asc = 0.01 A g Ac = Ag – A S C = 0.99 Ag Pu = 0.4 fck.Ac + 0.67 fy ASC 2250x103 = 0.4 × 25 × 0.99 A g + 0.67 × 415 × 0.01 Ag A g = 177 437.8 mm² #Diameter of column $D = \sqrt{\frac{4 \times 177437.8}{3.14}}$ = 475.43 mm D = 480 mm D should not be less than 0.12× L 0.12 × 3 750 = 450mm -ok D should not be less than 400 mm -ok D=480mm #Check for min eccentricity e_{min} = Lo/500 + D/30 = 3750/500 + 480/30 =23.5mm e_{max} = 0.05 × D = 0.05 × 480 = 24mm emin < emax :- OK #Check for slenderness ratio L/D = 3750/480 = 7.8 < 12 :- short column Asc = 0.01 × (π × 480²/4) = 1808.64 mm² Assume 20mm dia of bar Provide 6 bars of 20mm Transverse steel Diameter = ϕt = ¼ × ϕL max or 6mm whichever is greater a) = ¼ × 20 or 6mm 5mm or 6mm ϕt = 6mm a) Spacing Min of the following 1) D = 480mm 2) 16 ϕL = 16 × 20 = 320mm 3) 300mm Use 6mm + links at 300mm c/c</p>	<p>1</p> <p>1</p> <p>1</p> <p>1</p>	
--	---	-------------------------------------	--



c)	<p>Design on R.C. column footing with following data. Size of column = 400 mm x 400 mm. Safe bearing capacity of soil = 200 kN/m². Load on column = 1400 kN. Concrete M20 and steel Fe 415 is used. Calculate depth of footing from B.M. Criteria. No shear check is required.</p> <p>Column = 400mm x 400mm SBC = 200KN/m² P = 1400KN Factored Load = 1400 x 1.5 = 2100KN f_{ck} = 20N/mm² f_y = 415N/mm² Ultimate Bearing Capacity = 2 x SBC = 400KN/m²</p> <p>Size of footing W_f = 2100KN A_f = 1.05 x W_f/SBC = 1.05 x 2100/400 = 5.51m² L = B = $\sqrt{A_f} = \sqrt{5.51} = 2.35\text{m}$ Adopt footing of size 2.35m x 2.35m</p> <p>#Calculation of Upward soil pressure (q) $q = W_f / (L \times B) = 2100 / (2.35 \times 2.35) = 380.27\text{KN/m}^2$</p> <p># Calculation of Depth from flexure L_x = L_y = (2.35-0.4)/2 = 0.975 m M = q * L_x² / 2 M_x = M_y = 380.27 * 0.975 * 0.975 / 2 = 180.75 KN m</p> <p># Check for depth required $d_{\text{reqd}} = \sqrt{\left[\frac{M}{q f_{ck} b} \right]}$ $= \sqrt{\frac{180.75 \times 10^6}{0.138 \times 20 \times 1000}} = 255.91\text{mm} = 260\text{mm}$ D = 260 + 50 = 310mm</p> <p>#Calculation of Steel $A_{stx} = A_{sty} = 0.5 f_{ck} / f_y \left[1 - \sqrt{1 - \frac{4.6 M d}{f_{ck} b d^2}} \right] * b d$ = 0.5 x 20 / 415 $\left[1 - \sqrt{1 - \frac{4.6 * 180.75 * 10^6}{20 * 1000 * 260^2}} \right] * 1000 * 260 = 2377.58 \text{ mm}^2$</p>	1 1 1 1 1	6M
----	---	---------------------------	----



	Using 20mm bar ($A\phi = 314\text{mm}^2$) Spacing = $1000 A\phi / A_{st}$ = $1000 \times 314.8 / 2377.58$ = 132.40mm = 120mm Provide 20mm at 120mm c/c	1	
--	---	---	--

Pinnacle