


ENGINEERING MECHANICS – SEMESTER 1

CBCGS MAY 18


Q1] a) Find fourth force(F_4) completely so as to give the resultant of the system force as shown in figure. (4)

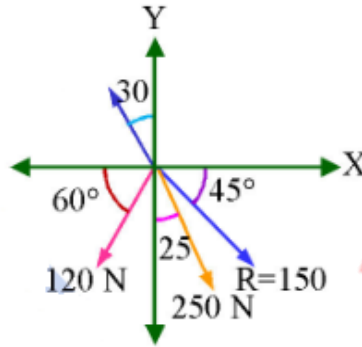

Solution:-

Let F_4 act as an angle α as shown in the figure.

Given, resultant of forces F_1, F_2, F_3 and F_4 is $R = 150\text{N}$

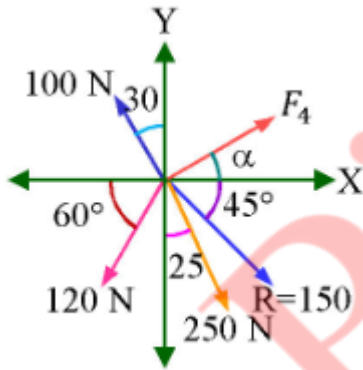

Resolving the forces along Y-axis ,

$$100\cos 30 - 120\sin 60 - 250\cos 25 + F_4\sin \alpha = -150\sin 45$$

$$F_4\sin \alpha = -150\sin 45 - 100\cos 30 + 120\sin 60 + 250\cos 25$$

$$F_4\sin \alpha = 137.8314 \dots\dots\dots(1)$$

Resolving the forces along X-axis,

$$-100\sin 30 - 120\cos 60 + 250\sin 25 + F_4\cos \alpha = 150\cos 45$$

$$F_4\cos \alpha = 110.4115\text{N} \dots\dots\dots(2)$$

Squaring and adding (1) and (2),

$$(F_4 \sin \alpha)^2 + (F_4 \cos \alpha)^2 = (137.8314)^2 + (110.4115)^2$$

$$F_4^2 (\sin^2 \alpha + \cos^2 \alpha) = 18997.5052 + 12190.6887$$

$$F_4^2 = 31188.1939$$

$$F_4 = 176.6018 \text{ N}$$

Dividing (1) by (2), $\frac{F_4 \sin \alpha}{F_4 \cos \alpha} = \frac{137.8314}{110.4115}$


$$\tan \alpha = 1.2483$$

$$\alpha = 51.3031^\circ$$

Hence,


$$F_4 = 176.6018 \text{ N}, \alpha = 51.3031^\circ$$

Q1] b) Determine the magnitude and direction of the smallest force P required to start the wheel W= 10N over the block. (4)

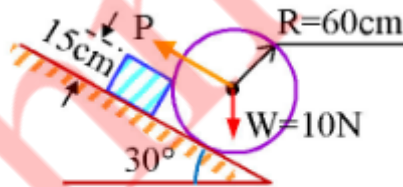

Solution:-

The simplified figure is as shown



Let point C is the tip of rectangle block from figure

$$OC = OA = 60 \text{ cm} \dots\dots(1)$$

$$AB = 15 \text{ cm} \dots\dots(\text{height of the block})$$

OUR CENTERS :

KALYAN | DOMBIVLI | THANE | NERUL | DADAR

Contact - 9136008228

Hence $OB = 60 - 15 = 45\text{cm}$ (2)

By Pythagoras theorem

$$BC = \sqrt{OC^2 - OB^2} = \sqrt{60^2 - 45^2} = 39.6863\text{cm}$$

$$BC = 39.6863\text{cm}$$

When the wheel is about to start. Normal reaction at the point A is zero and

$$\Sigma M_C = 0.$$

$$\therefore P \times OB - W \cos 30 \times BC - W \sin 30 \times OB = 0$$


$$45P = 10 \cos 30 \times 39.6863 + 10 \sin 30 \times 45$$

$$45P = 568.6932.$$

$$P = 12.6376\text{N}$$


Hence the force P required to start the wheel is 12.6376N.

Q1] c) If a horizontal force of 1200N is applied to the block of 1000N then block will be held in equilibrium or slide down or move up? $\mu = 0.3$. (4)

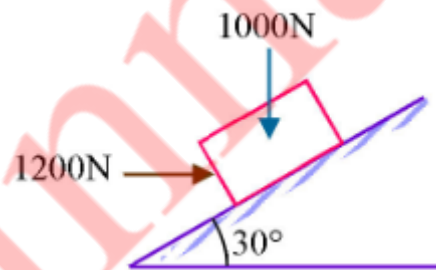

Solution:-

Let N be normal reaction and F_s be the frictional force

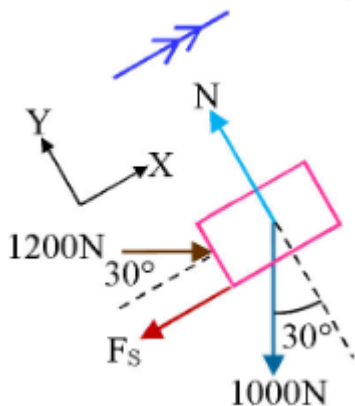

At the instant of impending motion $\Sigma F_Y = 0$

Therefore N- $1000\cos 30 - 1200\sin 30 = 0$

$$N = 1000\cos 30 + 1200\sin 30.$$

$$N = 1466.0254\text{N}$$

$$F_s = \mu \times N = 0.3(1466.0254)$$

$$F_s = 439.8076\text{N.} \dots\dots\dots(1)$$

Neglecting friction, net upward up the plane

$$-1000\sin 30 + 1200\cos 30 = 539.2305\text{N.} \dots\dots\dots(2)$$


CASE 1:- Block is impending to move up the plane

$$\Sigma F_x = -F_s - 1000\sin 30 + 1200\cos 30$$

$$= -439.8076 + 539.2305. \dots\dots\dots(\text{ From 1 \& 2})$$

$$\Sigma F_x = 99.4229\text{N}$$

Therefore a net force of 99.4229N acts up the plane so the block moves up the plane.

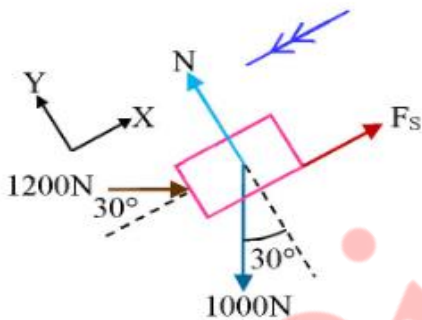

CASE 2:- Block is impending to move down the plane

$$\Sigma F_x = F_s - 1000\sin 30 + 1200\cos 30$$

$$= 439.8076 - 539.2305. \dots\dots\dots(\text{ From 1 \& 2})$$


$$\Sigma F_x = 979.0381\text{N}$$

Therefore a net force of 979.0381N acts up the plane so the block moves up the plane.

Q1] d) Starting from rest at S = 0 a car travels in a straight line with an acceleration as shown by they a-s graph. Determine the car's speed when S = 20m ,S = 100m,


S =150m.

(4)

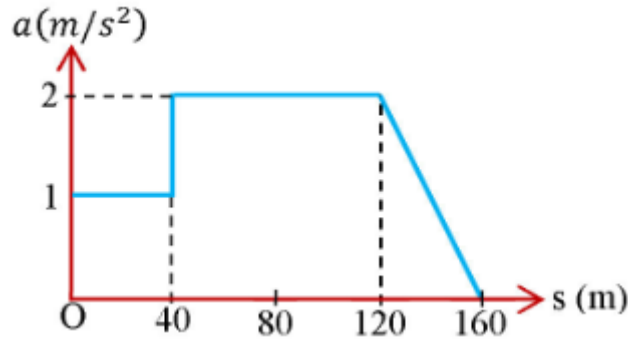

Solution:-

Part 1:-

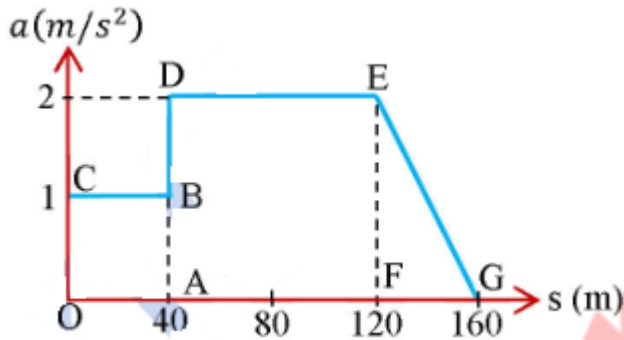

For first 40m of journey

$$a = 1\text{m/s}^2$$

$$V \frac{dv}{ds} = 1 \dots\dots\dots (a = V \frac{dv}{ds})$$

$$Vdv = ds$$

$$\text{On integration, } \frac{V^2}{2} = s + c_1 \dots\dots\dots (1)$$

When s = 0, v = 0

$$c_1 = 0 \dots\dots\dots (2)$$

$$\text{From (1) and (2) } \frac{V^2}{2} = s$$

$$\text{Therefore } V^2 = 2s$$

$$\text{When } s = 20\text{m, } V^2 = 40$$

$$\text{Therefore } v = 6.3246 \text{ m/s}$$

$$\text{When } s = 40\text{m, } V^2 = 80$$

OUR CENTERS :

KALYAN | DOMBIVLI | THANE | NERUL | DADAR

Contact - 9136008228

Therefore $v = 8.9443 \text{ m/s}$ (3)

Part 2:-

Motion of car from 40m to 120m

$$a = 2 \text{ m/s}^2$$

$$V \frac{dv}{ds} = 2.$$

$$Vdv = ds$$

On integration, $\frac{V^2}{2} = s + c_1.$

$$V^2 = 4s + 2c_1. \dots\dots\dots(4)$$

When $s = 40$, $v = 80$ from (3)

$$80 = 160 + 2c_2$$

$$-80 = 2c_2. \dots\dots\dots(5)$$

From (4) and (5)

$$V^2 = 4s - 80$$

When $s = 100\text{m}$, $V^2 = 400 - 80 = 320$

$$v = 17.8885 \text{ m/s}$$

When $s = 120\text{m}$, $v = 480 - 80 = 400$

$$V = 20\text{m/s}. \dots\dots\dots(6)$$

Part 3:-

Motion of car from 120m to 160m

E(120,2) and F(160,0)

Using two-point from equation of EF is

$$\frac{a-2}{2-0} = \frac{s-120}{120-160}$$

$$-20a + 40 = s - 120$$

$$160 - s = 20a$$

$$160 - s = 20V$$

$$(160 - s)ds = 20v dv$$

On integration, $160s - \frac{s^2}{2} = 20 + C_3 \dots\dots\dots(7)$

When $s = 120$, $v = 20\text{m/s}$from (6)

$$160 \times 120 - (0.5) \times 120 \times 120 = 10 \times 20 \times 20 + C_3$$

$$C_3 = 8000. \dots\dots\dots(8)$$

From (7) and (8)

$$160s - \frac{s^2}{2} = 20 \times \frac{v^2}{2} + c^3$$

$$\text{When } s = 150\text{m, } 160(150) - \frac{1}{2}s^2 = 10v^2 - 8000$$

$$v^2 = 475$$


$$V = 21.7945\text{m/s}$$

Hence when $s = 20\text{m}$, $v = 6.3246\text{m/s}$

When $s = 100\text{m}$, $v = 17.8885\text{m/s}$

When $s = 150\text{m}$, $v = 21.7945\text{m/s}$.


Q1] e) Three m_1, m_2, m_3 of masses 1.5kg, 2kg and 1kg respectively are placed on a rough surface with coefficient of friction 0.20 as shown. If a force F is applied to accelerate the blocks at 3m/s^2 . What will be the force that 1.5kg block exerts on 2kg block? (4)



Solution:-

$$m_1 = 1.5\text{kg, } m_2 = 2\text{kg, } m_3 = 1\text{kg, } \mu = 0.20, a = 3\text{m/s}^2$$

For m_3 :-



$$\text{Weight } w_3 = m_3 \times g = 1g$$

$$\text{Normal reaction } N_3 = W_3 = g$$

$$\text{Dynamic friction force} = F_3 = \mu N_3 = 0.2g$$

Let the force exerted by m_2 on m_3 be F_{23}

By Newton 2nd law

$$\Sigma F = ma$$


$$F_{23} - F_3 = m_3 \times a$$

$$F_{23} = F_3 + m_3 \times a$$

$$F_{23} = 0.2g + 1a \quad \dots\dots\dots(1)$$

Similarly,

For m_2 :-

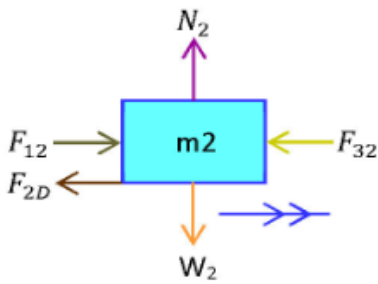

Weight $W_2 = m_2g$

Normal reaction $N_2 = W_2 = 2g$

Dynamic friction force $= F_2 D = \mu N_2 = 0.2 \times 2g = 0.4g$.

Let the force exerted by m_1 on m_2 be F_{12}

By Newton's 2nd law

$$\Sigma F = ma$$

$$F_{12} - F_{32} - F_2 = m_2 \times a$$

$$F_{12} = F_{32} + F_2 + m_2 \times a$$

$$= (0.2g + 1a) + 0.4g + 2a \quad \dots\dots\dots\text{from (1)}$$


$$= 0.6g + 3a$$

$$= 0.6 \times 9.81 + 3 \times 3$$

$$= 14.886 \text{ N}$$


The force that 1.5 kg block exerts on 2kg block = 14.886N.

Q2] a) A dam is subjected to three forces as shown in fig. determine the single equivalent force and locate its point of intersection with base AD (6)

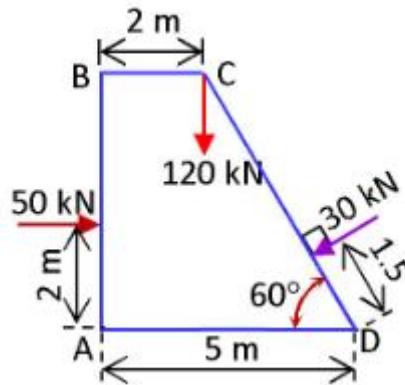

Solution:-

Let R be the resultant and let it act at an angle α to the horizontal

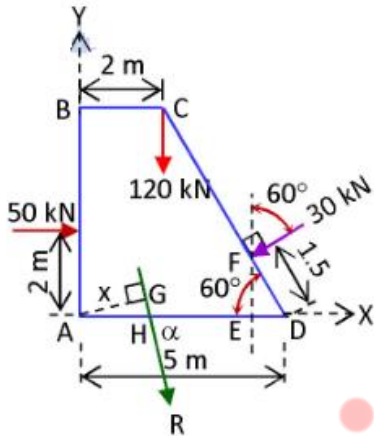

In ΔFED , $FD = 1.5\text{m}$

$$\therefore FE = FD \sin 60^\circ = 1.2990 \text{ and } ED = FD \cos 60^\circ = 0.75$$

$$\therefore AE = AD - ED = 5 - 0.75 = 4.25$$

Resolving the forces along X-axis, $R_x = 50 - 30 \sin 60^\circ = 24.0192\text{N}$

Resolving the forces along Y-axis, $R_y = -120 - 30 \cos 60^\circ = -135$

$$\therefore R = \sqrt{R_x^2 + R_y^2} = \sqrt{(24.0192)^2 + (-135)^2} = 137.1201\text{N}$$

$$\text{And, } \alpha = \tan^{-1} \left(\frac{R_y}{R_x} \right) = \tan^{-1} \left(\frac{-135}{24.0192} \right) = -79.9115^\circ$$

Resultant moment at A = $-50 \times 2 - 120 \times 2 - 30 \sin 60^\circ \times 4.25 + 30 \cos 60^\circ \times 1.2990$

$$A = -370\text{N m}$$

By Varignon's Theorem,

$$\therefore 370 = 137.1201 \times X$$

OUR CENTERS :

KALYAN | DOMBIVLI | THANE | NERUL | DADAR

Contact - 9136008228

$$X = 2.6984\text{m}$$

$$\text{In } \Delta AGH, \sin\alpha = \frac{x}{AH}$$

$$AH = \frac{x}{\sin\alpha} = \frac{2.6984}{\sin(79.9115)} = 2.7407\text{m}$$


Hence,

$$\text{Resultant force} = 137.1201\text{N } (79.9115^\circ)$$

$$\text{Resultant moment} = 370\text{N m}$$

Resultant cuts base AD at a distance of 2.7407m right of A

Q2] b) A cylinder weighing , 1000N and 1.5m diameter is supported by a beam AB of length 6m and weight 400N as shown. Neglecting friction at the surface of contact of the cylinder. Determine (1) wall reaction at 'D'; (2) hinged reaction at support 'A'; (3) tension in the cable BC (8)




Solution:-

Diameter of cylinder = 1.5m

Radius OD = OP = 0.75m

Also, AB = 6



OUR CENTERS :

KALYAN | DOMBIVLI | THANE | NERUL | DADAR

Contact - 9136008228

Now, $\angle DAP = 90^\circ - 45^\circ = 45^\circ$

Also, $\triangle AOP \cong \triangle AOD$


$$\angle OAP = \frac{1}{2} \times 45 = 22.5^\circ$$

In $\triangle AOP$, $\angle OPA = 90^\circ$

$$\tan \angle OAP = \frac{OP}{AP}$$

$$\tan 22.5 = \frac{0.75}{AP}$$


$$AP = \frac{0.75}{\tan 22.5} = 1.8107\text{m}$$



FBD of cylinder is as shown

Since the cylinder is in equilibrium,

By Lami's theorem.



$$\frac{W}{\sin(180-45)} = \frac{R_D}{\sin(90+45)} = \frac{R_P}{\sin 90}$$

$$\frac{1000}{\sin 135} = \frac{R_D}{\sin 135} \text{ and } \frac{1000}{\sin 135} = \frac{R_P}{1}$$

$$R_D = 1000\text{N and } R_P = 1414.2136\text{N}$$

FBD of beam AB is as shown

Let Q be mid-point of AB

$$AQ = 3\text{m}$$

Since beam AB is in equilibrium,

$$\sum M_A = 0$$

$$-R_P \times AP - 400 \times AQ \cos 45 + T \sin(30 + 45) \times AB = 0$$


OUR CENTERS :

KALYAN | DOMBIVLI | THANE | NERUL | DADAR

Contact - 9136008228

$$-1414.2136 \times 1.8107 - 400 \times 3 \times 0.7071 + T \times 0.9659 \times 6 = 0$$

$$T = 588.266\text{N}$$



Also, $\sum F_x = 0$

$$R_A \cos \alpha + R_p \cos 45 - T \sin 60 = 0$$

$$R_A \cos \alpha + 1414.2136 \times 0.7071 - 588.266 \times 0.866 = 0$$

$$R_A \cos \alpha = -490.5676 \dots\dots\dots(1)$$

And $\sum F_y = 0$

$$R_A \sin \alpha - 400 - R_p \sin 45 + T \cos 60 = 0$$

$$R_A \sin \alpha - 400 - 1414.2136 \times 0.7071 + 588.266 \times 0.5 = 0$$

$$R_A \sin \alpha = 1105.8790 \dots\dots\dots(2)$$

Squaring and adding (1) and (2)

$$R_A^2 \cos^2 \alpha + R_A^2 \sin^2 \alpha = (-490.5676)^2 + (1105.8790)^2$$

$$R_A = 1209.8037\text{N}$$


Dividing, (2) by (1), $\frac{R_A \sin \alpha}{R_A \cos \alpha} = \frac{1105.8790}{490.5676}$

$$\alpha = \tan^{-1} 2.25431 = 66.0779^\circ$$

Hence,

1. Wall reaction at D = $R_D = 1000\text{N}$
2. Hinged reaction at support A = 1209.8037

Q2] c) Two balls of 0.12kg collide when they are moving with velocities 2m/sec and 6m/sec perpendicular to each other as shown in fig. if the coefficient of restitution between 'A' and 'B' is 0.8 determine the velocity of 'A' and 'B' after impact (6)



Solution:-

$$m_1 = m_2 = 0.12\text{kg} \quad u_{1x} = 2\text{m/s} \quad u_{1y} = 0\text{m/s} \quad u_{2x} = 0\text{m/s} \quad u_{2y} = 6\text{m/s} \quad c=0.8$$

Case1 :- line of impact is X-axis

Velocities along Y-axis remains constant

$$v_{1y} = u_{1y} = 0\text{m/s} \quad \text{and} \quad v_{2y} = u_{2y} = 6\text{m/s} \quad \dots\dots\dots(1)$$

By law of conservation of momentum,

$$m_1 u_{1x} + m_2 u_{2x} = m_1 v_{1x} + m_2 v_{2x}$$

$$0.12 \times 2 + 0.12 \times 0 = 0.12 \times v_{1x} + 0.12 \times v_{2x}$$

$$\text{Dividing by } 0.12, \quad 2 = v_{2x} + v_{1x} \quad \dots\dots\dots(2)$$

$$\text{Also, coefficient of restitution} = e = \frac{v_{2x} - v_{1x}}{u_{1x} - u_{2x}}$$

$$0.8 = \frac{v_{2x} - v_{1x}}{2 - 0}$$

$$1.6 = v_{2x} - v_{1x} \quad \dots\dots\dots(3)$$

Solving (2) and (3)

$$v_{2x} = 1.8\text{m/s} \quad \text{and} \quad v_{1x} = 0.2\text{m/s} \quad \dots\dots\dots(4)$$

From (1) and (4)

$$v_1 = \sqrt{v_{1x}^2 + v_{1y}^2} \quad \text{and} \quad v_2 = \sqrt{v_{2x}^2 + v_{2y}^2}$$

$$v_1 = \sqrt{0.2^2 + 0^2} \quad \text{and} \quad v_2 = \sqrt{1.8^2 + 6^2}$$

$$v_1 = 0.2\text{m/s} \quad \text{and} \quad v_2 = 6.2642\text{m/s}$$

Also after impact

Velocity of ball A = 0.2m/s

Velocity of ball B = 6.2642 m/s

Case 2:- line of impact is y-axis

Velocities along x-axis remains constant

$$v_{1x} = u_{1x} = 2m/s \text{ and } v_{2x} = u_{2x} = 0m/s \text{(5)}$$

By law of conservation of momentum,

$$m_1 u_{1y} + m_2 u_{2y} = m_1 v_{1y} + m_2 v_{2y}$$

$$0.12 \times 0 + 0.12 \times 6 = 0.12 \times v_{1y} + 0.12 \times v_{2y}$$

$$\text{Dividing by } 0.12, 6 = v_{2y} + v_{1y} \text{(6)}$$

$$\text{Also, coefficient of restitution } = e = \frac{v_{2y} - v_{1y}}{u_{1y} - u_{2y}}$$

$$0.8 = \frac{v_{2y} - v_{1y}}{0 - 6}$$

$$-4.8 = v_{2y} - v_{1y} \text{(7)}$$

Solving (6) and (7)

$$v_{2y} = 0.6m/s \text{ and } v_{1y} = 5.4m/s \text{(8)}$$

From (4) and (8)

$$v_1 = \sqrt{v_{1x}^2 + v_{1y}^2} \text{ and } v_2 = \sqrt{v_{2x}^2 + v_{2y}^2}$$

$$v_1 = \sqrt{2^2 + 5.4^2} \text{ and } v_2 = \sqrt{0^2 + 0.6^2}$$

$$v_1 = 5.7585m/s \text{ and } v_2 = 0.6m/s$$

$$\text{Also, } \alpha_1 = \tan^{-1} \left(\frac{v_{1y}}{v_{1x}} \right) = \tan^{-1} \left(\frac{5.4}{2} \right) = 69.67^\circ$$

Hence, after impact

Velocity of ball A = 5.7585 m/s


Velocity of ball B = 0.6m/s

OUR CENTERS :

KALYAN | DOMBIVLI | THANE | NERUL | DADAR

Contact - 9136008228

Q3] a) Find the centroid of the shaded portion of the given area shown in figure (8)

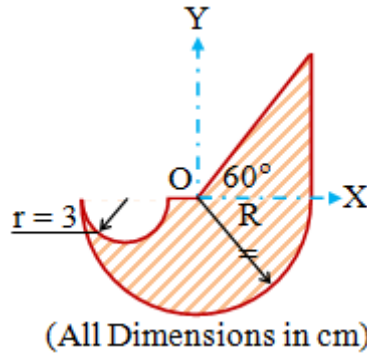

Solution:-

In ΔAOB

$OB = 8\text{cm}$

$$\tan 60^\circ = \frac{AB}{BO} \quad \therefore \sqrt{3} = \frac{AB}{8} \quad \therefore AB = 8\sqrt{3}$$

Also $OD = 8\text{cm}$ and $CD = 3\text{cm}$

$OC = 8 - 3 = 5\text{cm}$

SR NO	PART	Area(in cm^2)	X-co-ord of C.G. (x_1)	Y-co-ord of C.G. (y_1)	Ax_1	Ay_1
1)	Triangle AOB $B = 8, H = 8\sqrt{3}$	$= 0.5BH$ $= 0.5 \times 8 \times 8\sqrt{3}$ $= 55.4256$	$8 - \frac{B}{3} = 8 - \frac{8}{3}$ $= 5.3333$	$\frac{H}{3} = \frac{8\sqrt{3}}{3}$ $= 4.6188$	295.6033	256.000
2)	Semicircle radius(R)=8	$0.5\pi R^2$ $= 0.5 \times 8^2\pi$ $= 100.5372$	0	$-\frac{4R}{3\pi} = \frac{-4 \times 8}{3}$ $= -3.3955$	0.0000	-341.333
3)	Cut semicircle radius(r) = 3	$-0.5\pi r^2$ $= -0.5 \times 3^2\pi$ $= -14.1372$	-5	$-\frac{4r}{3\pi} = \frac{-4 \times 3}{3}$ $= -1.2732$	70.6858	18.000
	Total	141.8193			366.2891	-67.3333

$$\bar{x} = \frac{\sum Ax}{\sum A} = \frac{366.2891}{141.8193} = 2.5828$$

$$\bar{y} = \frac{\sum Ay}{\sum A} = \frac{-67.3333}{141.8193} = -0.4748$$


Hence centroid is equals to (2.5828,0.4748)

OUR CENTERS :

KALYAN | DOMBIVLI | THANE | NERUL | DADAR

Contact - 9136008228

Q3] b) Knowing that the tension in AC is $T_2 = 20\text{kN}$ determine required values T_1 and T_3 so that the resultant of the three forces are 'A' is vertical. Also, calculate this resultant. (6)

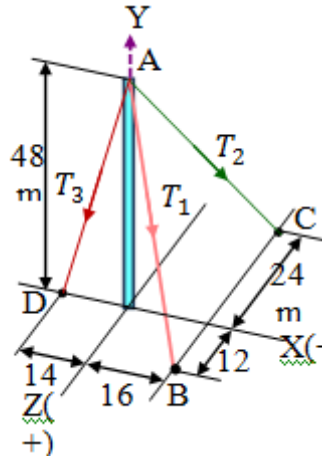

Solution:-

From figure we observe,

$$A = (0, 48, 0); \quad B = (16, 0, 12); \quad C = (16, 0, -24); \quad D = (-14, 0, 0);$$

Let $\vec{a}, \vec{b}, \vec{c}$ and \vec{d} be the position vectors of points A, B, C and D respectively w.r.t. to origin O.

$$\therefore \vec{OA} = \vec{a} = 48\vec{j}; \quad \vec{OB} = \vec{b} = 16\vec{j} + 12\vec{k};$$

$$\vec{OC} = \vec{c} = 16\vec{i} - 24\vec{k}; \quad \vec{OD} = \vec{d} = -14\vec{i};$$

Now,

$$\vec{AB} = \vec{b} - \vec{a} = 16\vec{j} + 12\vec{k} - 48\vec{j}$$

$$\vec{AC} = \vec{c} - \vec{a} = 16\vec{i} - 24\vec{k} - 48\vec{j}$$

$$\vec{AD} = \vec{d} - \vec{a} = -14\vec{i} - 48\vec{j}$$

Magnitude,

$$|\vec{AB}| = \sqrt{(16)^2 + (-48)^2 + (12)^2} = 52$$

$$|\vec{AC}| = \sqrt{(16)^2 + (-48)^2 + (-24)^2} = 56$$

$$|\vec{AD}| = \sqrt{(-14)^2 + (-48)^2} = 50$$

Unit vector,

$$\hat{AB} = \frac{\vec{AB}}{|\vec{AB}|} = \frac{16\vec{i} - 48\vec{j} + 12\vec{k}}{52} = \frac{4}{13}\vec{i} - \frac{12}{13}\vec{j} + \frac{3}{13}\vec{k}$$

$$\hat{AC} = \frac{\vec{AC}}{|\vec{AC}|} = \frac{16\vec{i} - 48\vec{j} - 24\vec{k}}{56} = \frac{2}{7}\vec{i} - \frac{6}{7}\vec{j} - \frac{3}{7}\vec{k}$$

$$\hat{AD} = \frac{\vec{AD}}{|\vec{AD}|} = \frac{-14\vec{i} - 48\vec{j}}{50} = -\frac{7}{25}\vec{i} - \frac{24}{25}\vec{j}$$

OUR CENTERS :

KALYAN | DOMBIVLI | THANE | NERUL | DADAR

Contact - 9136008228

$$\text{Tension in AB} = \bar{T}_1 = T_1 \left(\frac{4}{13}\vec{i} - \frac{12}{13}\vec{j} + \frac{3}{13}\vec{k} \right)$$

$$\text{Tension in AC} = \bar{T}_2 = 20 \left(\frac{2}{7}\vec{i} - \frac{6}{7}\vec{j} - \frac{3}{7}\vec{k} \right)$$

$$\text{Tension in AD} = \bar{T}_3 = T_3 \left(\frac{-7}{25}\vec{i} - \frac{24}{25}\vec{j} \right)$$

$$\begin{aligned} \text{Net force} &= \bar{T}_1 + \bar{T}_2 + \bar{T}_3 = T_1 \left(\frac{4}{13}\vec{i} - \frac{12}{13}\vec{j} + \frac{3}{13}\vec{k} \right) + 20 \left(\frac{2}{7}\vec{i} - \frac{6}{7}\vec{j} - \frac{3}{7}\vec{k} \right) + T_3 \left(\frac{-7}{25}\vec{i} - \frac{24}{25}\vec{j} \right) \\ &= \left(\frac{4}{13}T_1 + 20 \times \frac{2}{7} - \frac{7}{25}T_3 \right)\vec{i} - \left(\frac{12}{13}T_1 + 20 \times \frac{6}{7} + \frac{24}{25}T_3 \right)\vec{j} + \left(\frac{3}{13}T_1 - 20 \times \frac{3}{7} \right)\vec{k} \quad \dots\dots\dots(1) \end{aligned}$$

Given, the resultant at 'A' is vertical i.e., along y-axis

$$\frac{3}{13}T_1 - 20 \times \frac{3}{7} \text{ \& } \frac{4}{13}T_1 + 20 \times \frac{2}{7} - \frac{7}{25}T_3 \quad \dots\dots\dots(2)$$

$$\frac{3}{13}T_1 = 20 \times \frac{3}{7}$$

$$T_1 = \frac{260}{7} = 37.1429kN \quad \dots\dots\dots(3)$$

$$\text{From (2) and (3), } \frac{4}{13} \times \frac{260}{7} + 20 \times \frac{2}{7} - \frac{7}{25}T_3 = 0$$

$$\frac{120}{7} = \frac{7}{25}T_3$$


$$T_3 = \frac{3000}{49} = 61.2245kN \quad \dots\dots\dots(4)$$

From (1), (3) and (4),

$$\text{Resultant} = - \left(\frac{12}{13} \times \frac{260}{7} + 20 \times \frac{6}{7} + \frac{24}{25} \times \frac{3000}{49} \right)$$

$$\text{Resultant} = - \frac{5400}{49} = -110.2041kN$$


Q3] c) Fig shows a collar of mass 20kg which is supported on the smooth rod. The attached springs are both compressed 0.4m when $d = 0.5\text{m}$. determine the speed of the collar after the applied force $F = 100\text{N}$ causes it to be displaced so that $d = 0.3\text{m}$. knowing that collar is at rest when $d = 0.5\text{m}$ (6)



Solution:-

$$m = 20\text{kg},$$

position 1: when $d = 0.5\text{m}$

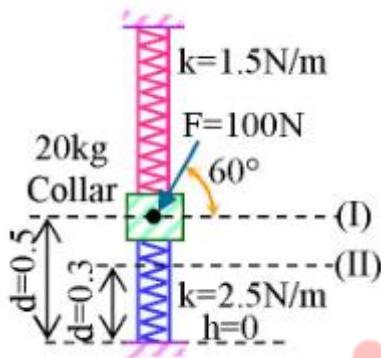

$$v = 0$$

$$KE_1 = \frac{1}{2}mv_1^2 = 0 \quad \text{and} \quad PE_1 = mgh = 20g \times 0.5 = 10g$$

$$\text{Compression of Top spring } (x_{T1}) = 0.4\text{m}$$

$$\text{Compression of B spring } (x_{B1}) = 0.4\text{m}$$

$$\text{Spring energy of top spring} = E_{S_{T1}} = \frac{1}{2}K_{T1}x_{T1}^2 = \frac{1}{2} \times 1.5 \times 0.4^2 = 0.12\text{J}$$

$$\text{Spring energy of bottom spring} = E_{S_{B1}} = \frac{1}{2}K_{B1}x_{B1}^2 = \frac{1}{2} \times 2.5 \times 0.4^2 = 0.2\text{J}$$

Position 2: when $d = 0.3\text{m}$

Let v be the velocity of the block

$$KE_2 = \frac{1}{2}mv^2 = \frac{1}{2} \times 20 \times v^2 = 10v^2 \quad \text{and} \quad PE_2 = mgh = 20g \times 0.3 = 6g$$

OUR CENTERS :

KALYAN | DOMBIVLI | THANE | NERUL | DADAR

Contact - 9136008228

Compression of top spring (x_{T2}) = $0.4 - 0.2 = 0.2\text{m}$

Compression of bottom spring (x_{B2}) = $0.4 + 0.2 = 0.6\text{m}$

Spring energy of top spring = $E_{S_{B2}} = \frac{1}{2} K_{T2} x_{T2}^2 = \frac{1}{2} \times 1.5 \times 0.2^2 = 0.03\text{J}$

Spring energy of bottom spring = $E_{S_{B2}} = \frac{1}{2} K_{B2} x_{B2}^2 = \frac{1}{2} \times 2.5 \times 0.6^2 = 0.45\text{J}$

Work done by the vertical component of the force = $W = 100 \sin 60 \times 0.2 = 17.32015\text{J}$

Applying work energy principle for the position (1) and (2), $U_{1-2} = KE_2 - KE_1$

$W + PE_1 - PE_2 + E_{S_{T1}} + E_{S_{B1}} - E_{S_{B2}} - E_{S_{B2}} = KE_2 - KE_1$


$17.3205 + 10g - 6g + 0.12 + 0.2 - 0.03 - 0.45 = 10v^2$

$56.3871 = 10v^2$

$V = 2.3746 \text{ m/s}$

The speed of the collar after the force F is applied = 2.3746 m/s .


Q4] a) Find the support reactions at point 'A' and 'B' of the given beam (8)

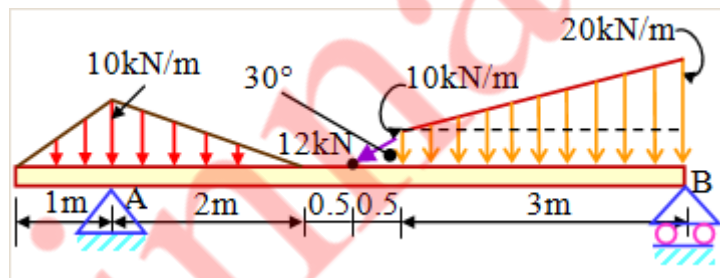

Solution:-

Effective forces of distributed load CAD = $\frac{1}{2} \times 1 \times 10 = 5\text{kN}$

It acts as $\frac{1}{3}\text{m}$ from A

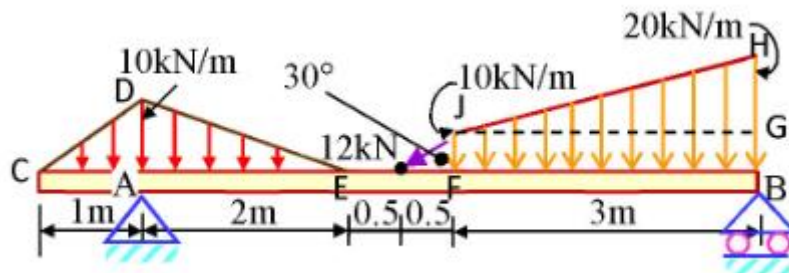

Effective force of distributed load EAD = $\frac{1}{2} \times 2 \times 10 = 10\text{kN}$


It acts at $\frac{2}{3}\text{m}$ from A

Effective force of distributed load JFBGJ = $3 \times 10 = 30\text{kN}$

It acts at 1.5m from B

Effective force of distributed load JGH = $\frac{1}{2} \times 3 \times (20 - 10) = 15\text{kN}$

It acts at 1m from B

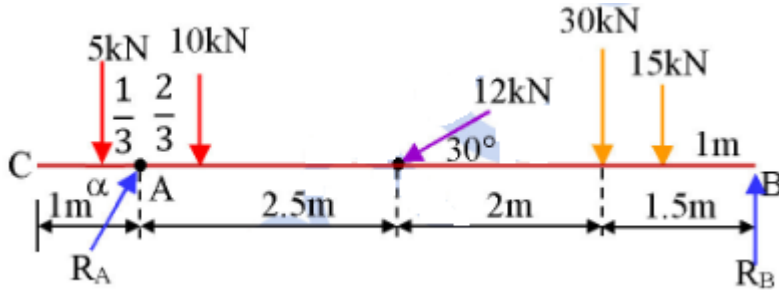

Since the beam is in equilibrium $\sum M_A = 0$

$$5 \times \frac{1}{3} - 10 \times \frac{2}{3} - 12 \sin 30 \times 2.5 - 30 \times 4.5 - 15 \times 5 + R_B \times 6 = 0$$

$$-230 + R_B \times 6 = 0$$

$$R_B = 38.333\text{kN}$$

Also, $\sum F_x = 0$

$$R_A \cos \alpha - 12 \cos 30 = 0$$

$$R_A \cos \alpha = 10.3923\text{kN} \quad \dots\dots\dots(1)$$

And, $\sum F_y = 0$

$$R_A \sin \alpha - 5 - 10 - 30 - 12 \sin 30 - 15 + R_B = 0$$

$$R_A \sin \alpha - 66 + 38.333 = 0$$

$$R_A \sin \alpha = 27.6667\text{kN} \quad \dots\dots\dots(2)$$

Squaring and adding (1) and (2),

$$R_A^2 \cos^2 \alpha + R_A^2 \sin^2 \alpha = 10.3923^2 + 27.6667^2$$

$$R_A = 29.5541\text{kN}$$

Dividing, (2) by (1), $\frac{R_A \sin \alpha}{R_A \cos \alpha} = \frac{27.6667}{10.3923}$

$$\alpha = \tan^{-1}(2.6622) = 69.4125^\circ$$

Hence,

Reaction at A = 29.5541

Reaction at B = 38.3333kN

OUR CENTERS :

KALYAN | DOMBIVLI | THANE | NERUL | DADAR

Contact - 9136008228

Q4] b) The motion of the particle is defined by the relation $a = 0.8t \text{ m/s}^2$ where 't' is measured in sec. It is found that at $X = 5\text{cm}, V = 12\text{m/sec}$ when $t = 2\text{sec}$ find the position and velocity at $t = 6\text{sec}$. (6)

Solution:-

Given :- $a = 0.8t$ $\frac{dv}{dt} = 0.8t$

$$dv = 0.8t dt$$

On integration

$$V = 0.8 \times \frac{t^2}{2} + c$$

Therefore , $V = 0.4t^2 + c$(1)

Given ,when $t = 2$ then $V = 12$

$$12 = 0.4 \times 2^2 + c$$

$$12 = 1.6 + c$$

$$c = 10.4$$
(2)

From (1) & (2)

$$V = 0.4t^2 + 10$$
(3)

Therefore $\frac{dX}{dt} = 0.4t^2 + 10$.

$$dX = (0.4t^2 + 10)dt$$

On integration, $X = 0.4 \times \frac{t^3}{3} + 10.4t + k$ (4)

Given , when $t = 2$ then $X = 5$

$$5 = 0.4 \times \frac{2^3}{3} + 10.4 \times 2 + k$$

$$k = -253/15$$
(5)

From (4) and (5)

$$X = 0.4 \times \frac{t^3}{3} + 10.4t + k$$

$$X = 0.4 \times \frac{t^3}{3} + 10.4t - \frac{253}{15}$$

OUR CENTERS :

KALYAN | DOMBIVLI | THANE | NERUL | DADAR

Contact - 9136008228

When $t = 6$,


From (3) $V = 0.4 \times 6 \times 6 + 10.4 = 24.8 \text{ m/s}$

From (6) $X = 0.4 \times \frac{6^3}{3} + 10.4t - \frac{253}{15}$

$X = 74.333$ from the initial position

Q 4] c) Rod EB in the mechanism shown in the figure has angular velocity of 4 rad/sec at the instant shown in counter clockwise direction. Calculate

- 1) Angular velocity of AD 2) velocity of collar 'D'. 3) velocity of point 'A' (6)

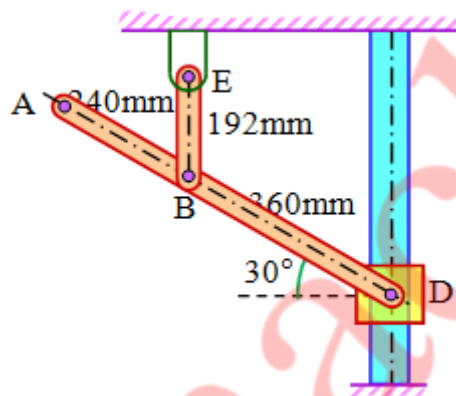


Solution:-

$$\omega_{EB} = 4 \text{ rad/sec}, EB = 192 \text{ mm} = 0.192 \text{ m}$$

$$AB = 240 \text{ mm} = 0.24 \text{ m}, DB = 360 \text{ mm} = 0.36 \text{ m}$$

Instantaneous center of rotation is the point of intersection of \vec{v}_A and \vec{v}_B .

Let I be the ICR as shown in the figure

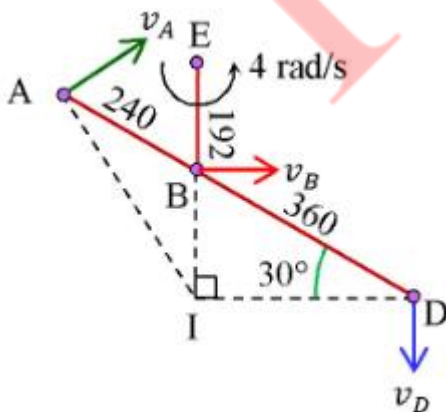

In ΔBID

$$\angle BDI = 30^\circ, \angle BID = 90^\circ$$

$$\angle IBD = 180 - 30^\circ - 90^\circ = 60^\circ$$

OUR CENTERS :

KALYAN | DOMBIVLI | THANE | NERUL | DADAR

Contact - 9136008228

$$IB = 0.36 \sin 30 = 0.18 \dots\dots\dots(1) \text{ and}$$

$$ID = 0.36 \cos 30 = 0.3117 \text{m} \dots\dots\dots(2)$$

$$\text{Also } \angle IBA = 180 - 60^\circ = 120^\circ \dots\dots\dots(3)$$

In ΔIBA , by cosine rule

$$IA^2 = IB^2 + AB^2 - 2IA \times AB \times \cos \angle IBA$$

$$IA^2 = 0.18^2 + 0.24^2 - 2 \times 0.18 \times 0.24 \times \cos 120^\circ \dots\dots\dots(\text{from 1})$$

$$IA = 0.3650 \text{m} \dots\dots\dots(4)$$

By sine rule, $\frac{AB}{\sin I} = \frac{IB}{\sin A} = \frac{IA}{\sin B}$

$$\frac{0.24}{\sin I} = \frac{0.3650}{\sin 120} \dots\dots\dots(\text{from 3 \& 4})$$

$$\sin I = \frac{0.24 \times \sin 120^\circ}{0.3650} = 0.5694$$

$$\angle AIB = 34.7113^\circ$$

Now, instantaneous velocity of point B = $r\omega$

$$v_B = EB \times \omega_{EB} = 0.192 \times 4 = 0.768 \text{m/s} \dots\dots\dots(5)$$

$$\text{Angular velocity of the rod AD} = \omega_{AD} = \frac{v_B}{r} = \frac{v_B}{IB} = \frac{0.768}{0.18} = 4.2667 \text{rad/s} \dots\dots\dots(\text{from 1 \& 5}) \dots\dots(6)$$

Instantaneous velocity of point D = $r\omega$

$$= ID \times \omega_{AD} = 0.3117 \times 4.2667 = 1.3302 \text{m/s} \dots\dots\dots(\text{from 2 \& 6})$$

And instantaneous velocity of point A = $r\omega$


$$= IA \times \omega_{AD} = 0.3650 \times 4.2667 = 1.5572 \text{m/s} \dots\dots\dots(\text{from 4 \& 6})$$

Hence,

1. Angular velocity of AD = 4.2667 rad/sec
2. Velocity of collar 'D' = 1.3302 m/s

Velocity of point A = 1.5572 m/s


Q5] a) A simply supported pin jointed truss is loaded and supported as shown in fig, (1) identify the members carrying zero forces (2) find support reactions. (3) find forces in members CD, CG, FG and CF using method of section (8)

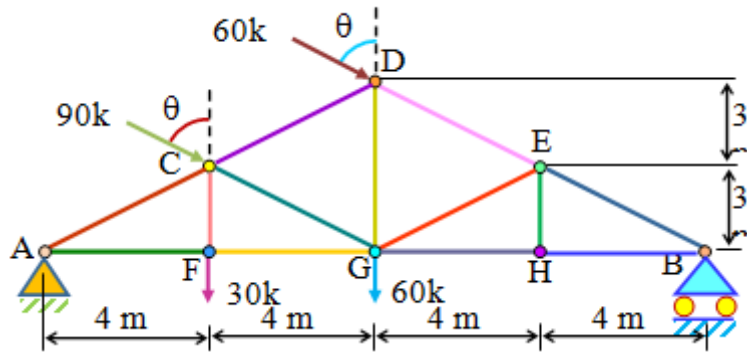

Solution:-

$$\text{In } \Delta GFC, \tan\theta = \frac{GF}{CF} = \frac{4}{3}$$

$$\theta = \tan^{-1}\left(\frac{4}{3}\right) = 53.1301^\circ$$

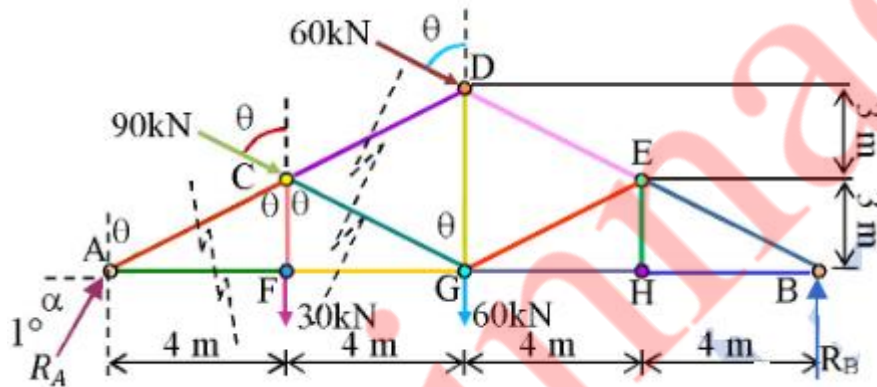

$$\sin\theta = 0.8 \text{ and } \cos\theta = 0.6 \dots\dots\dots(1)$$

zero force members:


loading at joint H is as shown.

Member EH will have zero force.

Similarly, after EH is removed loading at joint E is as shown

Member EG will have zero force.

Support reactions:

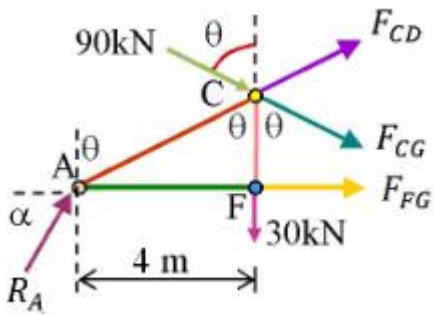

As the truss is in equilibrium, $\sum M_A = 0$

$$-30 \times 4 - 90 \cos \theta \times 3 - 60 \cos \theta \times 8 - 60 \sin \theta \times 6 - 60 \times 8 + R_B \times 16 = 0$$

$$-120 - 360 \times 0.6 - 270 \times 0.8 - 480 \times 0.6 - 360 \times 0.8 - 480 + 16R_B = 0 \quad \dots\dots(\text{from 1})$$

$$-1608 + 16R_B = 0$$

$$R_B = 100.5 \text{ kN}$$

Also, $\sum F_Y = 0$

$$R_A \sin \alpha - 30 - 60 - 90 \cos \theta - 60 \cos \theta + R_B = 0$$

$$R_A \sin \alpha = 79.5 \text{ kN} \quad \dots\dots\dots(2)$$

And, $\sum F_X = 0$

$$R_A \cos \alpha + 90 \sin \theta + 60 \sin \theta = 0$$

$$R_A \cos \alpha + 150 \times 0.8 = 0$$

$$R_A \cos \alpha = -120 \text{ kN} \quad \dots\dots\dots(3)$$

Squaring and adding (2) and (3),

$$(R_A \sin \alpha)^2 + (R_A \cos \alpha)^2 = (79.5)^2 + (-120)^2$$

$$R_A^2 (\sin^2 \alpha + \cos^2 \alpha) = 6320.25 + 14400$$

$$R_A^2 = 20720.25$$

$$R_A = 143.9453 \text{ kN}$$

Dividing, (2) and (3), we get

$$\tan \alpha = 0.6625$$

$$\alpha = 33.5245^\circ$$

Method of sections:

Applying conditions of equilibrium to the section as shown $\sum M_A = 0$

$$-30 \times 4 - (90 + F_{CG}) \cos \theta \times 4 - (90 + F_{CG}) \sin \theta \times 3 = 0$$

$$-120 - (90 + F_{CG}) \times 0.6 \times 4 - (90 + F_{CG}) \times 0.8 \times 3 = 0 \quad \dots\dots\dots(\text{from 1})$$

OUR CENTERS :

KALYAN | DOMBIVLI | THANE | NERUL | DADAR

Contact - 9136008228

$$-4.8(90 + F_{CG}) = 120$$

$$F_{CG} = -115 \text{ kN} \dots\dots\dots(4)$$

Also, $\sum F_Y = 0$

$$R_A \sin \alpha - 30 - F_{CG} \cos \theta + F_{CD} \cos \theta - 90 \cos \theta = 0$$

$$79.5 - 30 - 115 \times 0.6 + F_{CD} \times 0.6 - 90 \times 0.6 = 0$$

$$64.5 + 0.6 F_{CD} = 0$$

$$F_{CD} = -107.5 \text{ kN} \dots\dots\dots(5)$$


And, $\sum F_X = 0$

$$R_A \cos \alpha + F_{FG} + F_{CG} \sin \theta + F_{CD} \sin \theta + 90 \sin \theta = 0$$

$$-120 + F_{FG} - 115 \times 0.8 - 107.5 \times 0.8 + 90 \times 0.8 = 0$$

$$F_{FG} = 226 \text{ kN}$$

Applying conditions of equilibrium to the section shown below, $\sum M_A = 0$

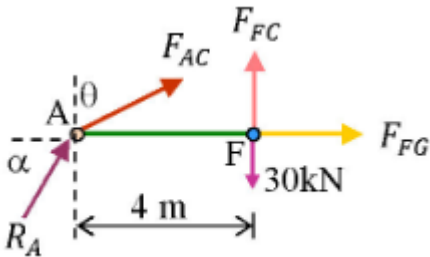

$$F_{FC} \times 4 - 30 \times 4 = 0$$

$$F_{FC} = 30 \text{ kN} \dots\dots\dots(6)$$

Also, $\sum F_Y = 0$

$$R_A \sin \alpha - 30 + F_{AC} \cos \theta + F_{FC} = 0$$

$$79.5 - 30 - F_{AC} \times 0.6 + 30 = 0$$

$$F_{AC} = 132.5 \text{ kN}$$

Members carrying zero forces are EH and EG

Support reactions:-

$$R_A = 143.9453 \text{ kN}$$


$$R_B = 100.5 \text{ kN}$$

Forces in members:-

$$CD = 107.5 \text{ kN (C)} \quad CG = 115 \text{ kN (C)}$$

FG = 226kN(T) and CF = 30kN(T)

Q5] b) A jet of water discharging from nozzle hits a vertical screen placed at a distance of 6m from the nozzle at a height of 4m. when the screen is shifted by 4m away from the nozzle from its initial position the jet hits the screen again at the same point. Find the angle of projection and velocity of projection of the jet at the nozzle. (6)

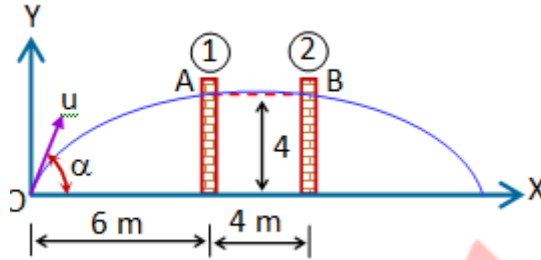

Solution:-

The path of the projectile is given by $y = x \tan \theta - \frac{gx^2}{2u^2} \sec^2 \theta$ (1)

The water jet passes through the point A(6,4) and B(10,4)

Substituting , x =6 and y = 4 in (1) we get $4 = 6 \tan \theta - \frac{36g}{2u^2} \sec^2 \theta$ (2)

Substituting , x =10 and y = 4 in (1) we get $4 = 10 \tan \theta - \frac{100g}{2u^2} \sec^2 \theta$ (3)

Multiplying equation (2) by 25 and equation (3) by 9 and then subtract

$$\therefore 100 - 36 = \left(150 \tan \theta - \frac{900g}{2u^2} \sec^2 \theta \right) - \left(90 \tan \theta - \frac{900g}{2u^2} \sec^2 \theta \right)$$

$$\therefore 64 = 60 \tan \theta$$

$$\theta = \tan^{-1} \left(\frac{64}{60} \right) = 46.8476^\circ$$
(4)

From (3) and (4) ,

$$4 = 10 \tan(46.8476) - \frac{100g}{2u^2} \sec^2(46.8476)$$

$$\frac{1048.58}{u^2} = 6.6667$$


$$u^2 = 157.2862$$

$$U = 12.5414 \text{ m/s}$$

Hence the angle of projection = 46.8476°

Velocity of projection = 12.5414 m/s


Q5] c) In a crank and connecting rod mechanism the length of crank and connecting rod are 300mm and 1200mm respectively. The crank is rotating at 180 rpm. Find the velocity of piston, when the crank is at an angle of 45° with the horizontal (6)

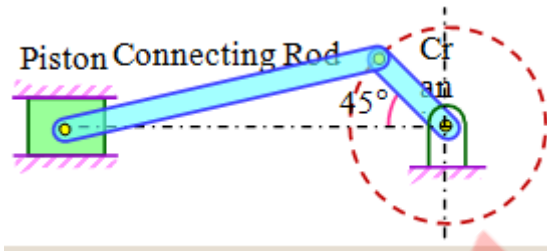

Solution:-

Let OA and AB be the crank and the connecting rod.

$$\text{Frequency}(n) = 180\text{rpm} = \frac{180}{60} = 3\text{rps}$$

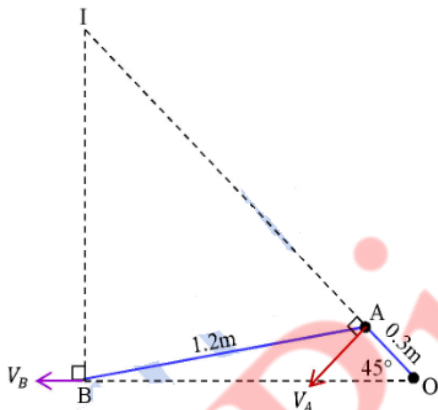

$$OA = 300\text{mm} = 0.3\text{m}, AB = 1200\text{mm} = 1.2\text{m}$$

We assume crank is rotating in anti-clockwise direction

$$\therefore \text{Angular velocity of the crank} = \omega_{AB} = 2\pi n = 2\pi \times 3 = 18.8496 \text{ rad/s}$$

$$\therefore \text{instantaneous velocity of point A} = r\omega$$

$$v_A = OA \times \omega_{OA} = 0.3 \times 18.8496 = 5.6549 \text{ m/s}$$

Instantaneous centre of rotation is the point of intersection of \vec{v}_A and \vec{v}_B

Let I be the ICR of the connecting rod AB as shown in figure.

$$\text{In } \Delta OAB \text{ by sine rule, } \frac{AB}{\sin O} = \frac{OA}{\sin B}$$

$$\therefore \frac{1.2}{\sin 45} = \frac{0.3}{\sin \angle ABO}$$

OUR CENTERS :

KALYAN | DOMBIVLI | THANE | NERUL | DADAR

Contact - 9136008228

$$\therefore \sin \angle ABO = \frac{0.3 \sin 45}{1.2} = 0.1768$$

$$\therefore \angle ABO = 10.1821^\circ$$

$$\text{In } \Delta IOB, \angle BIO = 180^\circ - 90^\circ - 45^\circ = 45^\circ$$

$$\text{In } \Delta IAB, \angle ABI = 90 - 10.1821^\circ = 79.8179^\circ$$

$$\therefore \angle IAB = 180^\circ - 45^\circ - 79.8179^\circ = 55.1821^\circ$$

$$\text{In } \Delta IAB \text{ by sine rule, } \frac{AB}{\sin I} = \frac{IB}{\sin A} = \frac{IA}{\sin B}$$

$$\therefore \frac{1.2}{\sin 45} = \frac{IB}{\sin 55.1821} = \frac{IA}{\sin 79.8179}$$

$$\therefore \frac{1.2}{\sin 45} = \frac{IB}{\sin 55.1821} \text{ and } \therefore \frac{1.2}{\sin 45} = \frac{IA}{\sin 79.8179}$$

$$IB = \frac{1.2 \sin 55.1821}{\sin 45} = 1.3931 \text{ and}$$

$$IA = \frac{1.2 \sin 79.8179}{\sin 45} = 1.6703$$

$$\text{Angular velocity of the rod } AB = \omega_{AB} = \frac{v_A}{r} = \frac{v_A}{IA} = \frac{5.6549}{1.6703} = 3.3855 \text{ rad/s}$$

$$\text{Instantaneous velocity of } B = r \omega_{AB} = IB \times \omega_{AB} = 1.3932 \times 3.3855 = 4.7168 \text{ m/s}$$

Hence, velocity of piston = 4.7168 m/s

Q6] a) Force $F = 80\mathbf{i} + 50\mathbf{j} - 60\mathbf{k}$ passes through a point $A(6,2,6)$. Compute its moment about a point $B(8,1,4)$ (4)

Solution:-

$$\vec{F} = 80\vec{i} + 50\vec{j} - 60\vec{k}$$

Let \vec{a} and \vec{b} be the position vectors of point A and B respectively.

$$\vec{a} = 6\vec{i} + 2\vec{j} + 6\vec{k} \text{ and } \vec{b} = 8\vec{i} + 1\vec{j} + 4\vec{k}$$

$$\vec{BA} = \vec{a} - \vec{b} = (6\vec{i} + 2\vec{j} + 6\vec{k}) - (8\vec{i} + 1\vec{j} + 4\vec{k}) = -2\vec{i} + 1\vec{j} + 2\vec{k}$$

$$\text{Moment of } F \text{ about } B = \vec{BA} \times \vec{F}$$

$$B = \begin{vmatrix} \vec{i} & \vec{j} & \vec{k} \\ -2 & 1 & 2 \\ 80 & 50 & -60 \end{vmatrix} = \vec{i}(-60 - 100) - \vec{j}(120 - 160) + \vec{k}(-100 - 80) = -160\vec{i} + 40\vec{j} - 180\vec{k}$$


OUR CENTERS :

KALYAN | DOMBIVLI | THANE | NERUL | DADAR

Contact - 9136008228


Hence , moment of F about B is $-160\vec{i} + 40\vec{j} - 180\vec{k}$ units

Q6] b) A force of 5kN is acting on the wedge as shown in fig. the coefficient of friction at all rubbing surfaces is 0.25. find the load 'W' which can be held in position. The weight of block 'B' may be neglected. (8)

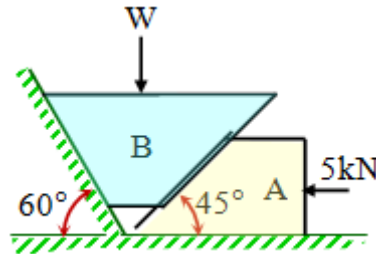

Solution:-

Let N_1, N_2, N_3 , be the normal reaction at the surface of contact

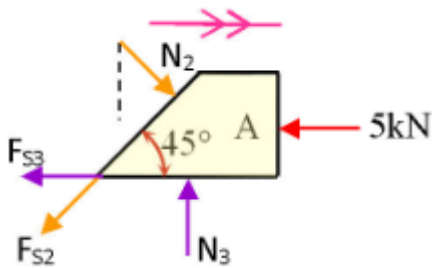

$$\therefore F_{S1} = \mu_1 N_1 = 0.25N_1, \quad F_{S2} = \mu_2 N_2 = 0.25N_2, \quad F_{S3} = \mu_3 N_3 = 0.25N_3 \quad \dots\dots\dots(1)$$


Block A is impending to move towards right.

Since the block A is under equilibrium , $\sum F_y = 0$

$$\therefore N_3 - F_{S2} \sin 45 - N_2 \cos 45 = 0$$

$$\therefore N_3 - 0.25N_2 \times 0.7071 - N_2 \times 0.7071 = 0 \quad \dots\dots\dots(\text{from 1})$$

$$\therefore N_3 - 0.8839N_2 = 0 \quad \dots\dots\dots(2)$$

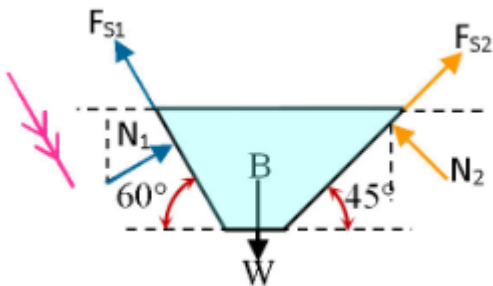

Also $\sum F_x = 0$

$$-5 - F_{S3} - F_{S2} \cos 45 + N_2 \sin 45 = 0$$

$$\therefore -5 - 0.25N_3 - 0.25N_2 \times 0.7071 + N_2 \times 0.7071 = 0 \dots\dots\dots(\text{from 1})$$

$$\therefore -0.25N_3 + 0.5303N_2 = 5 \dots\dots\dots(3)$$

$$\text{Solving (2) and (3) simultaneously, we get } N_3 = 14.2876\text{kN and } N_2 = 16.1642\text{kN} \dots\dots\dots(4)$$

Block B is impending to move down

Since the block B is under equilibrium, $\sum F_x = 0$

$$\therefore N_1 \sin 60 - F_{S1} \cos 60 + F_{S2} \cos 45 - N_2 \sin 45 = 0$$

$$\therefore 0.866N_1 - 0.25N_1 \times 0.5 + 0.25N_2 \times 0.7071 - N_2 \times 0.7071 = 0 \dots\dots\dots(\text{from 1})$$

$$\therefore 0.866N_1 - 0.125N_1 + 0.1768 \times 16.1642 - 16.1642 \times 0.7071 = 0 \dots\dots\dots(\text{from 4})$$

$$\therefore 0.741N_1 - 8.5719 = 0$$

$$N_1 = 11.4939 \text{ kN} \dots\dots\dots(5)$$

Also $\sum F_y = 0$

$$\therefore -W + N_1 \cos 60 + F_{S1} \sin 60 + F_{S2} \sin 45 + N_2 \cos 45 = 0$$


$$\therefore N_1 \times 0.5 + 0.25N_1 \times 0.866 + 0.25N_2 \times 0.7071 + N_2 \times 0.7071 = W \dots\dots\dots(\text{from 1})$$

$$\therefore 11.4939 \times 0.5 + 0.2165 \times 11.4939 + 0.1768 \times 16.1642 + 16.1642 \times 0.7071 = W \dots\dots(\text{from 4 and 5})$$

$$\therefore W = 22.5225\text{kN}$$


Hence a load of 22.5225kN can be held in the position.

Q6] c) The stiffness of the spring is 600 N/m. find the force 'P' required to maintain equilibrium such that $\theta = 30^\circ$. The spring is unstretched when $\theta = 60^\circ$. neglect weight of the rods. Use method of virtual work. (4)

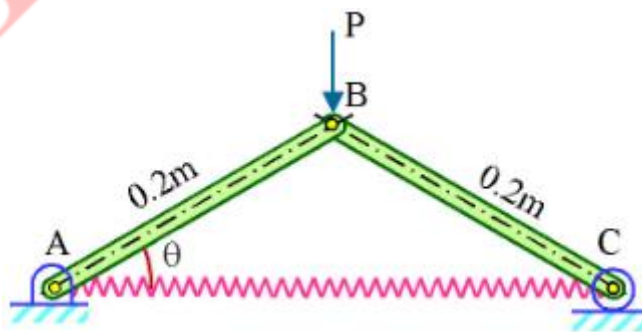

Solution:-

Principle of virtual work:-

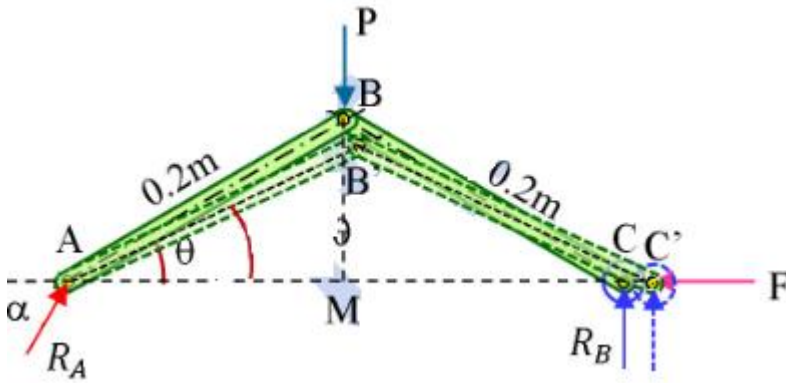

If a body is in equilibrium the total virtual work of forces acting on the body is zero for any virtual displacement.

$$K = 600\text{N/m}, \theta = 30^\circ$$

When $\theta = 60^\circ$

$$AM = AB\cos 60^\circ = 0.2\cos 60^\circ = 0.1 \text{ and } BM = AB\sin 60^\circ = 0.2\sin 60^\circ = 0.1732\text{m}$$

Given, the spring is unstretched

$$\text{Unstretched length of the spring} = AC = 2AM = 0.2\text{m}$$

When $\theta = 30^\circ$

$$AM = AB\cos 30^\circ = 0.2\cos 30^\circ = 0.1732 \text{ and } BM = AB\sin 30^\circ = 0.2\sin 30^\circ = 0.1\text{m}$$

$$AC = 2AM = 0.4\cos 30^\circ = 0.3464\text{m}$$

$$\text{Extension in the spring}(x) = 0.3464 - 0.2 = 0.1464\text{m}$$

$$\text{Spring force}(F) = Kx = 600 \times 0.1464 = 87.8461\text{N}$$

Let rod AB have a small virtual angular displacement $\delta\theta$ in the clockwise direction

The new position of rods AB' & B'C' is shown dotted

The reaction forces R_A and R_B are not active forces, so they do not perform any virtual work

Let A be the origin and dotted line through A be the X-axis of the system

Consider,

Active forces	Co-ordinate of the point of action along the forces	Virtual displacement
$F = 87.8461$	X Co-ordinate of C = $x_C = 0.4\cos\theta$	$\delta x_C = -0.4\sin\theta \delta\theta$
P	Y Co-ordinate of C = $y_B = 0.2\sin\theta$	$\delta y_B = 0.2\cos\theta \delta\theta$

By principle of virtual work, $\delta U = 0$

$$-F \times \delta x_C - P \times \delta y_B = 0$$

$$-87.8461 \times -0.4\sin\theta\delta\theta - P \times 0.2\cos\theta\delta\theta = 0$$

OUR CENTERS :

KALYAN | DOMBIVLI | THANE | NERUL | DADAR

Contact - 9136008228


Dividing by $\delta\theta$ and put $\theta = 30^\circ$, $35.1384\sin 30^\circ - 0.2P\cos 30^\circ = 0$

$$\frac{35.1384\sin 30^\circ}{0.2 \times \cos 30^\circ} = P$$

$$P = 101.4359 \text{ N}$$

Hence, the force P required to maintain equilibrium = 101.4359 kN


Q6] d) Two masses are interconnected with the pulley system. Neglecting frictional effect of pulleys and cord, determine the acceleration of masses m_1 , take $m_1 = 50\text{kg}$ and $m_2 = 40\text{kg}$. (4)

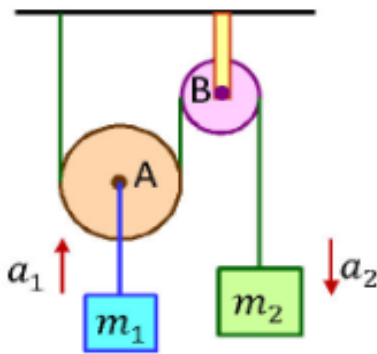

Solution:-

$$m_1 = 50\text{kg and } m_2 = 40\text{kg}$$

Let x_1 and x_2 be displacement of pulleys A and B respectively.



The string around the pulley is of constant length.

$$k_1 + x_1 + k_2 + x_1 + k_3 + x_2 = L$$

$$k_1 + k_2 + k_3 + 2x_1 = L - x_2$$

On differentiating w.r.t 't' we get $2v_1 = -v_2$

Where $\frac{dx}{dt} = v$ the velocities of the two pulleys again differentiating w.r.t we get


$$2a_1 = a_2$$

OUR CENTERS :

KALYAN | DOMBIVLI | THANE | NERUL | DADAR


Contact - 9136008228

$$a_1 = \frac{1}{2} a_2 \dots\dots\dots(1)$$



Let T be the Tension in the cord

Applying Newton's 2nd law , $\Sigma F_Y = m_1 a_1$



$$2T - 50g = 50 \times (0.5) a_2 \dots\dots\dots\text{from (1)}$$

$$2T = 50g + 25a_2.$$

$$T = 25g + 12.5a_2. \dots\dots\dots(2) \text{ (dividing by 2)}$$

Applying Newton's 2nd law to 40kg block

$$\Sigma F_Y = m_2 a_2$$

$$40g - T = 40a_2$$

$$40g - (25g + 12.5a_2) = 40a_2 \dots\dots\dots\text{from (2)}$$

$$40g - 25g - 12.5a_2 = 40a_2$$

$$15g = 52.5a_2$$

$$a_2 = \frac{15g}{52.5} = 2.8029 \text{ m/s}^2$$

Acceleration of the mass $m_2 = 2.8029 \text{ m/s}^2$