

**FLUID MECHANICS SOLUTION**

**SEM 4 (CBCGS-MAY 2018)**

**BRANCH-MECHANICAL ENGINEERING**

Q 1) A) Explain briefly boundary layer formation and define boundary layer thickness. (05)

Solution -

Boundary layer formation :

When a real fluid (viscous fluid) flows past a stationary solid boundary, a layer of fluid which comes in contact with the boundary surface, adheres to it (on account of viscosity) and condition of no slip occurs (The no-slip condition implies that the velocity of fluid at a solid boundary must be same as that of boundary itself). Thus the layer of fluid which cannot slip away from the boundary surface undergoes retardation; this retarded layer further causes retardation for the adjacent layers of the fluid, thereby developing a small region in the immediate vicinity of the boundary surface in which the velocity of the flowing fluid increases rapidly from zero at the boundary surface and approaches the velocity of main stream. The layer adjacent to the boundary is known as boundary layer. Boundary layer is formed whenever there is relative motion between the boundary and the fluid.

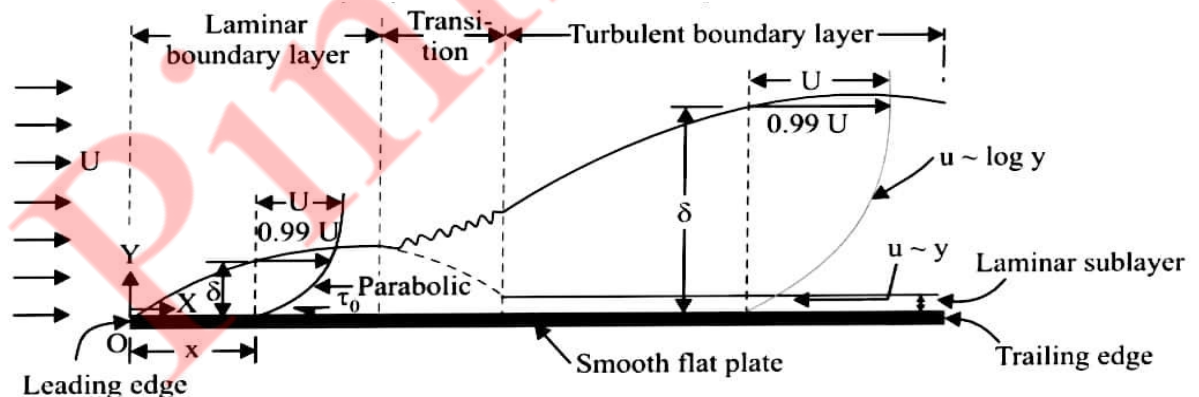


FIG : BOUNDARY LAYER ON A FLAT PLATE

Boundary layer thickness :

Thickness of the boundary layer is arbitrarily defined as that distance from the boundary in which the velocity reaches 99 per cent of the velocity of the free stream ( $u = 0.99U$ ). It is denoted by the symbol  $\delta$ .

OUR CENTERS :

KALYAN | DOMBIVLI | THANE | NERUL | DADAR

Contact - 9136008228

Q 1) B) With neat sketch explain working and construction of pitot tube. (05)

Solution –

Construction:

It consists of a glass tube in the form of a 90° bend of short length open at both its ends. It is placed in the flow with its bent leg directed upstream so that a stagnation point is created immediately in front of the opening. The kinetic energy at this point gets converted into pressure energy causing the liquid to rise in the vertical limb, to a height equal to the stagnation pressure.

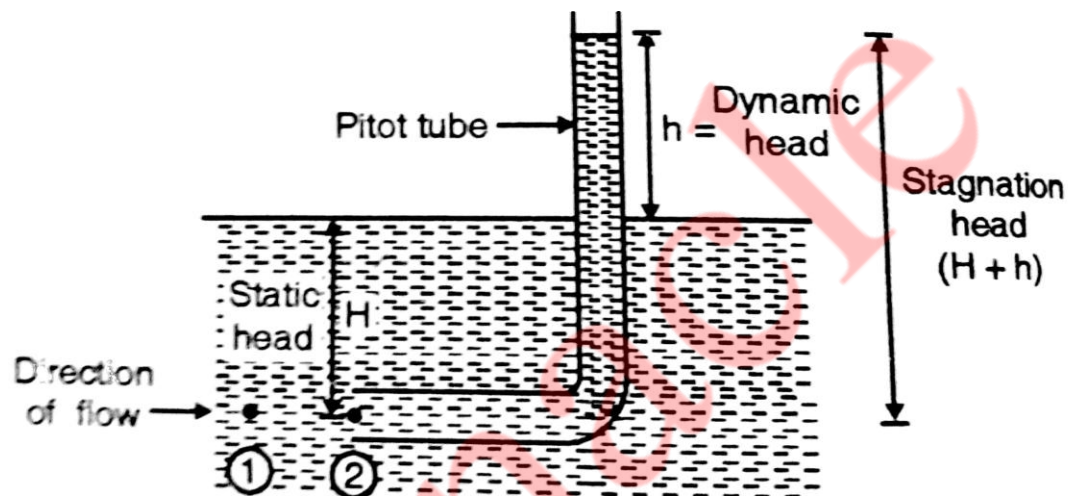


FIG : PITOT TUBE

Working :

Pitot tube is one of the most accurate devices for velocity measurement. It works on the principle that if the velocity of flow at a point becomes zero, the pressure there is increased due to conversion of kinetic energy into pressure.

Q 1) C) The following represents the velocity components. Calculate the unknown velocity component so that they satisfy the continuity equation. (05)

$$u = 2x^2; v = 2xyz$$

Solution:

$$u = 2x^2; v = 2xyz$$

Differentiating

$$\frac{\partial u}{\partial x} = 4x \quad \frac{\partial v}{\partial y} = 2xz$$

**OUR CENTERS :**

**KALYAN | DOMBIVLI | THANE | NERUL | DADAR**

**Contact - 9136008228**

Using continuity equation,

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} + \frac{\partial w}{\partial z} = 0$$

$$4x + 2xz + \frac{\partial w}{\partial z} = 0$$

$$\frac{\partial w}{\partial z} = -4x - 2xz \quad \dots(i)$$

Integrating Equation (i), We get,

$$\begin{aligned} w &= -4xz - xz^2 \\ &= -xz(4 + z) \end{aligned}$$

**Q 1) D) The absolute viscosity of liquid having specific gravity of 0.87 is 0.073 poise. Find kinematics viscosity in m/s and in Stokes. (05)**

**Solution:**

Given:

$$\text{Specific gravity } s = 0.87$$

$$\text{Absolute viscosity } \mu = 0.0073 \text{ Ns/m}^2$$

i) Kinematic viscosity  $\nu$

$$\text{weight density } \rho = s \times \rho_w = 0.87 \times 1000$$

$$= 870 \text{ Kg/m}^3$$

$$\text{Kinematic viscosity } \nu = \frac{\mu}{\rho} = \frac{0.0073}{870}$$

$$= 8.39 \times 10^{-6} \text{ m}^2/\text{sec}$$

$$= 0.0839 \text{ strokes}$$

**Q 1) E) Explain stability of floating bodies. (05)**

**Solution:**

Conditions of stable equilibrium:


Stable equilibrium:

When centre of buoyancy is lies above the centre of gravity, submerged body is stable.

**OUR CENTERS :**


**KALYAN | DOMBIVLI | THANE | NERUL | DADAR**

**Contact - 9136008228**

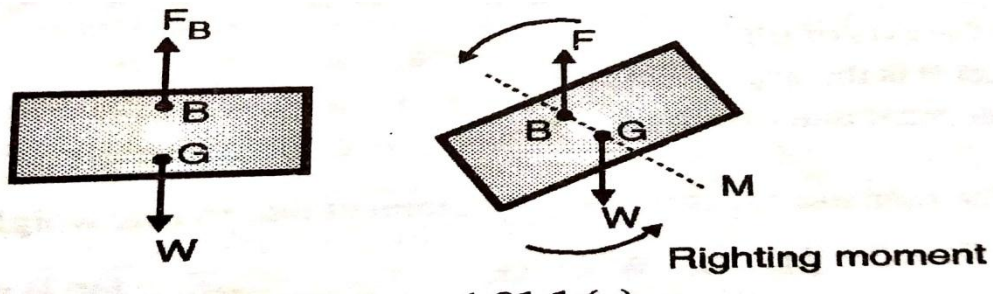


Unstable equilibrium:

When centre of buoyancy is lies below centre of gravity, submerged body is in unstable equilibrium.

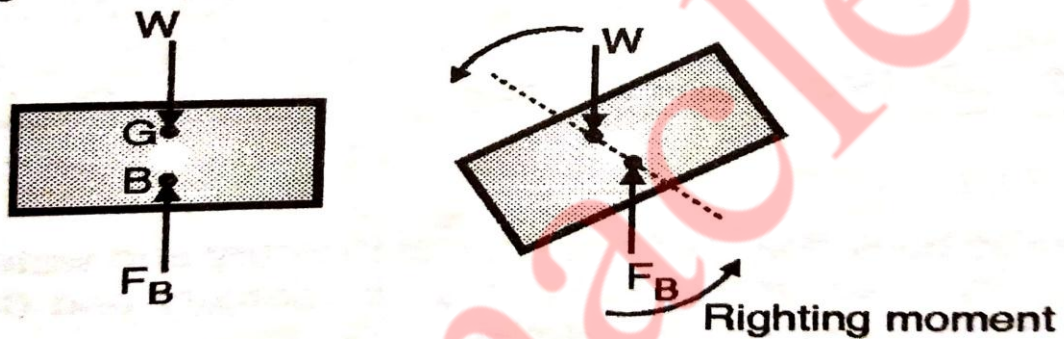

Neutral equilibrium:



When centre of buoyancy and centre of gravity is coincide, body is in neutral equilibrium.

Q 2) A) Derive the differential form of the general mass conservation equation in Cartesian coordinate for a fluid. (10)


**Solution:**

Continuity equation in Cartesian coordinate:

**OUR CENTERS :**

**KALYAN | DOMBIVLI | THANE | NERUL | DADAR**

**Contact - 9136008228**

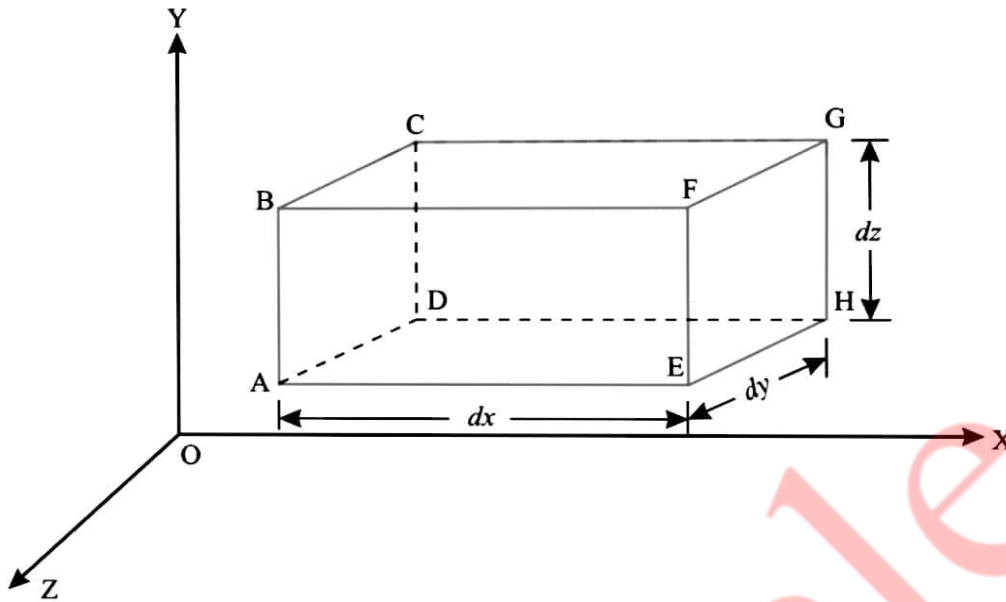

Consider a fluid element (control volume) – parallelepiped with sides  $dx$ ,  $dy$  and  $dz$  as shown in Fig.

Let,  $\rho$  = Mass density of the fluid at a particular instant;

$u, v, w$  = Components of velocity of flow entering the three faces of the parallelepiped.

Rate of mass of fluid entering the face ABCD (i.e. fluid influx).

$$= \rho \times \text{velocity in X-direction} \times \text{area of ABCD}$$

$$= \rho u dy dz \quad \dots(i)$$

Rate of mass of fluid leaving the face EFGH (i.e. fluid efflux).

$$= \rho u dy dz + \frac{\partial}{\partial x} (\rho u dy dz) dx \quad \dots(ii)$$

The gain in mass per unit time due to flow in the X-direction is given by the difference between the fluid influx and fluid efflux.

$\therefore$  Mass accumulated per unit time due to flow in X-direction

$$= \rho u dy dz - [\rho u + \frac{\partial}{\partial x} (\rho u) dx] dy dz$$

$$= - \frac{\partial}{\partial x} (\rho u) dx dy dz \quad \dots(iii)$$

**OUR CENTERS :**

**KALYAN | DOMBIVLI | THANE | NERUL | DADAR**

**Contact - 9136008228**

Similarly, the gain in fluid mass per unit time in the parallelepiped due to flow in Y and Z-directions

$$= - \frac{\partial}{\partial y} (\rho v) dx dy dz \quad (\text{in Y-direction}) \quad \dots(\text{iv})$$

$$= - \frac{\partial}{\partial z} (\rho w) dx dy dz \quad (\text{in Z-direction}) \quad \dots(\text{v})$$

The total (or net) gain in fluid mass per unit for fluid along three co-ordinate axes

$$= - \left[ \frac{\partial}{\partial x} (\rho u) + \frac{\partial}{\partial y} (\rho v) + (\rho w) \frac{\partial}{\partial z} \right] dx dy dz \quad \dots(\text{vi})$$

Rate of change of mass of the parallelepiped (control volume)

$$= \frac{\partial}{\partial t} (\rho dx dy dz) \quad \dots(\text{vii})$$

Equations (vi) and (vii), we get:

$$- \left[ \frac{\partial}{\partial x} (\rho u) + \frac{\partial}{\partial y} (\rho v) + (\rho w) \frac{\partial}{\partial z} \right] dx dy dz = \frac{\partial}{\partial t} (\rho dx dy dz)$$

Simplification and rearrangement of terms would reduce the above expression to:

$$\frac{\partial}{\partial x} (\rho u) + \frac{\partial}{\partial y} (\rho v) + \frac{\partial}{\partial z} (\rho w) + \frac{\partial}{\partial t} = 0 \quad \dots(\text{a})$$

This eqn. (a) is the general equation of continuity in three-dimensions and is applicable to any type of flow and for any fluid whether compressible or incompressible.

For steady flow  $\left( \frac{\partial \rho}{\partial t} = 0 \right)$  incompressible fluids ( $\rho = \text{constant}$ ) the equation reduces to:

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} + \frac{\partial w}{\partial z} = 0$$


For two dimensional flow, above eqn. reduces to:

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0$$

For one dimensional flow, say in X-direction, eqn. takes the form:

$$\frac{\partial u}{\partial x} = 0$$

**Q 2) B) A semicircular 12 m diameter tunnel is to be built under a 45 m deep, 240 m long lake. Determine the magnitude and direction of total hydrostatic force acting on the roof of the tunnel. (10)**

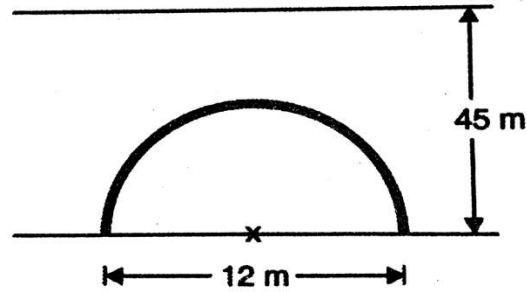


**Solution:**

Given :

Semi-circular diameter  $d = 12$  m depth of water in lake 45 m

To find : hydrostatic forces

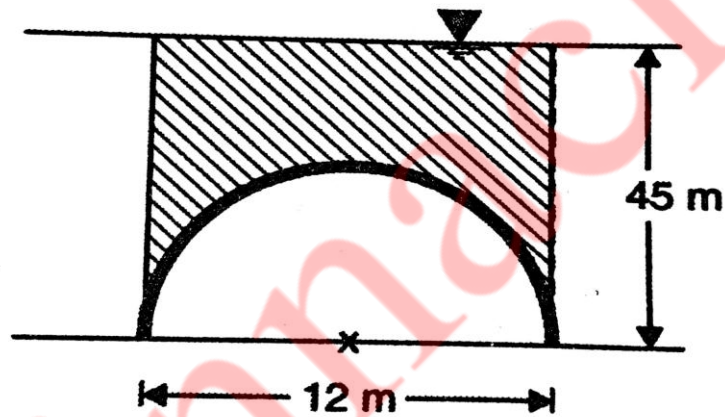

Total hydrostatic force acting on the roof of the tunnel

= Weight of liquid over the tunnel

= Weight – density  $\times$  volume

=  $\gamma_w \times L(\text{Area of rectangle} - \text{Area of semi circle})$

$$= 9.81 \times 240 \left[ 45 \times 12 - \frac{\pi \times 6^2}{2} \right]$$

$$= 2354.5(540 - 56.55)$$

$$= 1138234.68 \text{ kN}$$

**Q 3) A) A 90° reducing bend has a diameter 300 mm at inlet and 150 mm at exit carries 0.6 m<sup>3</sup>/s oil of specific gravity 0.85 with a pressure of 120 kN/ m<sup>2</sup> at inlet to the bend. The**


**OUR CENTERS :**

**KALYAN | DOMBIVLI | THANE | NERUL | DADAR**

**Contact - 9136008228**

volume of bend is  $0.15 \text{ m}^3$ . Find the magnitude and direction of the force on the bend. Neglect the frictional losses and assume both inlet and outlet sections to be at same horizontal level. (10)

Solution:

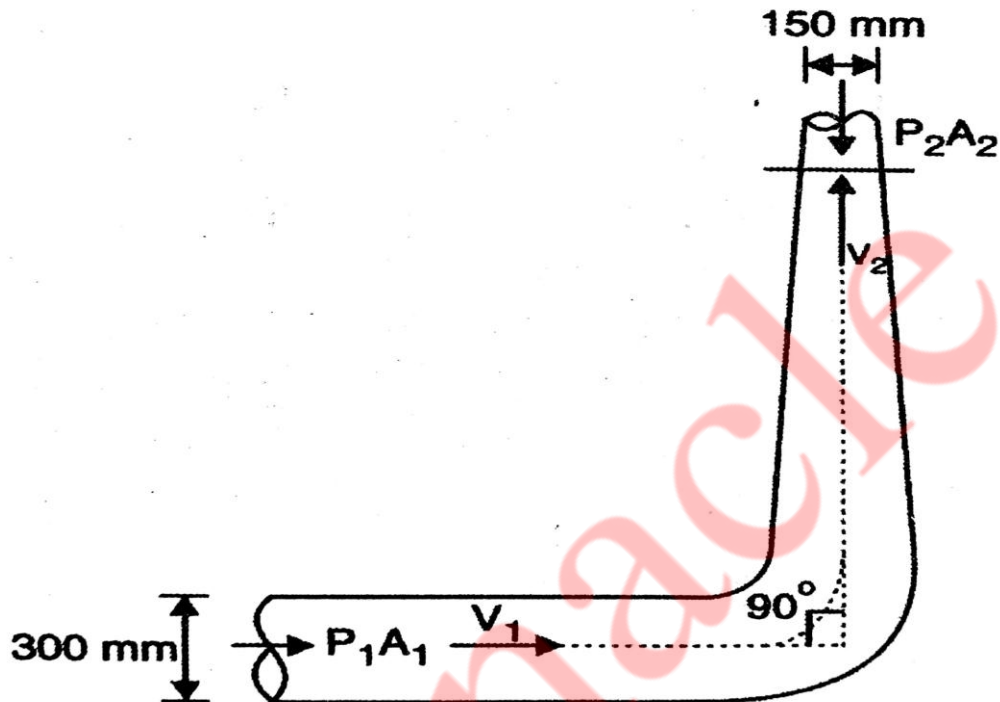

Discharge through bend  $Q = 0.6 \text{ m}^3/\text{s}$

$$A_1 = \frac{\pi}{4} (0.3)^2 = 0.0707 \text{ m}^2$$

$$A_2 = \frac{\pi}{4} (0.15)^2 = 0.0177 \text{ m}^2$$

Specific gravity  $s = 0.85$

Mass density of oil  $\rho = s \times \rho_{\text{water}} = 0.85 \times 1000 = 850 \text{ kg/m}^3$

Weight density  $\gamma = \rho g = 850 \times 9.81 = 8338.5 \text{ kg/m}^3$

$$= 8.34 \text{ kN/m}^3$$

Pressure at inlet  $p_1 = 120 \text{ kN/m}^2$

Volume of bend  $V = 0.15 \text{ m}^3$

Both inlet and outlet at same level,

**OUR CENTERS :**

**KALYAN | DOMBIVLI | THANE | NERUL | DADAR**

**Contact - 9136008228**



$$\text{Weight of bent } w = \gamma \times v = (\rho g) v = 850 \times 0.15$$

$$= 127.5 \text{ N}$$

Velocity at inlet and outlet

$$V_1 = \frac{Q}{A_1} = \frac{0.6}{0.0707} = 8.49 \text{ m}^3/\text{s}$$

$$V_2 = \frac{Q}{A_2} = \frac{0.6}{0.0177} = 3.39 \text{ m}^3/\text{s}$$

Using Bernoulli's equation

$$\frac{P_1}{\gamma} + \frac{V_1^2}{2g} + Z_1 = \frac{P_2}{\gamma} + \frac{V_2^2}{2g} + Z_2$$

$$\frac{120}{8.34} + \frac{8.49^2}{2 \times 9.81} + Z_1 = \frac{P_2}{8.34} + \frac{3.39^2}{2 \times 9.81} + Z_2$$

$$13.59 + 3.67 = \frac{P_2}{8.34} + 0.586$$

$$P_2 = 16.674 \times 8.34 = 139 \text{ kN/m}^2$$

By momentum principle

Net force in x-direction = mass flow rate  $\times$  change in velocity in x-direction

$$P_1 A_1 + F_x = \rho Q (0 - V_1)$$

$$120 \times 0.0707 + F_x = \left( \frac{850}{1000} \right) \times 0.6 (-8.49)$$

$$8.485 + F_x = -4.33$$

$$F_x = -(8.485 + 4.33) = -12.8 \text{ kN}$$

$$= 12.8 \text{ kN } (\leftarrow)$$

Net force in y-direction =  $\rho Q (V_2)$

$$-P_2 A_2 + F_y = \left( \frac{850}{1000} \right) \times 0.6 (3.39)$$

$$-139 \times 0.0177 + F_y = 1.729$$

$$-2.46 + F_y = 1.729$$

$$\therefore F_y = 4.189 \text{ kN}$$

$$\therefore F = \sqrt{(F_x^2 + F_y^2)}$$

**OUR CENTERS :**

**KALYAN | DOMBIVLI | THANE | NERUL | DADAR**

**Contact - 9136008228**

$$= \sqrt{(12.8^2 + 4.189^2)}$$


$$= 13.47 \text{ kN}$$

$$\theta = \tan^{-1} \left( \frac{F_x}{F_y} \right) = \tan^{-1} \left( \frac{4.189}{12.8} \right)$$

$$= 18.12^\circ$$

**Q 3) B) Consider a two dimensionless viscous incompressible flow of a Newtonian fluid between two parallel plates, separately by a distance 'b'. One of the plates is stationary and the other is moving with uniform velocity u. There is no pressure gradient in the flow. Obtain the general equation from the general Navier-Stokes equation. (10)**

**Solution:**

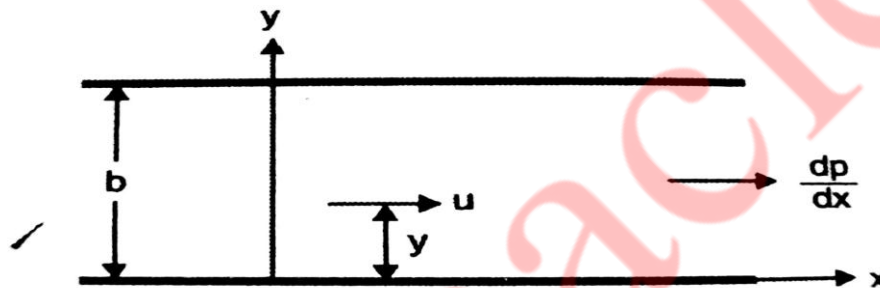

**FIG : LAMINAR FLOW BETWEEN TWO STRAIGHT PARALLEL PLATES**

Flow in x-direction

$$u = f_1(x, y, t), v = 0, w = 0$$

$$p = f_2(x, y, t)$$

$$\frac{\partial u}{\partial z} = 0 \quad \text{Represent flow is two-dimensional flow.} \quad \dots(i)$$

For this flow, continuity equation is reduced to

$$\frac{\partial u}{\partial x} = 0$$

$$\therefore u = f_1(y, t) \quad \dots(ii)$$

The body forces are assuming to be zero.

$$\therefore x = 0$$

Using Navier-Stokes equation,

**OUR CENTERS :**

**KALYAN | DOMBIVLI | THANE | NERUL | DADAR**

**Contact - 9136008228**

$$\begin{aligned}\frac{Du}{Dt} &= X - \frac{1}{\rho} \frac{\partial p}{\partial x} + v \left( \frac{\partial^2 u}{\partial x^2} + \frac{\partial^2 u}{\partial y^2} + \frac{\partial^2 u}{\partial z^2} \right) \\ &= X - \frac{1}{\rho} \frac{\partial p}{\partial x} + v \bar{V}^2 u \\ \bar{V}^2 &= \left( \frac{\partial^2}{\partial x^2} + \frac{\partial^2}{\partial y^2} + \frac{\partial^2}{\partial z^2} \right)\end{aligned}$$

From the above condition,

$$\frac{\partial u}{\partial t} = -\frac{1}{\rho} \frac{\partial p}{\partial x} + v \frac{\partial^2 u}{\partial x^2} \quad \dots(\text{iii})$$

$$0 = -\frac{1}{\rho} \frac{\partial p}{\partial y}$$

$$p = f_2(x, t) \quad \dots(\text{iv})$$

Since u is not function of x from equation (ii) and p is not a function of y, it can be concluded from equation (iii) and (iv), that  $\frac{\partial p}{\partial x}$  must be zero or function of time.

Assuming steady flow,  $\frac{du}{dt} = 0$

Integrating equation (iii) w.r.t. y, we get,

$$\frac{\partial u}{\partial y} = -\frac{1}{\mu} \frac{dp}{dx} \cdot y + A \quad \dots(\text{v})$$

Again integrating equation v, we get equation velocity distribution.

$$u = -\frac{1}{2\mu} \frac{dp}{dx} \cdot y^2 + Ay + B \quad \dots(\text{vi})$$

where A and B are constant

When one plate is stationary and other is moving, flow in such boundary condition is known as simple coquette flow.

$$\frac{dp}{dx} = 0$$

for this type of flow

Velocity of moving boundary is U.

(i)  $y = 0, u = 0$

(ii)  $y = b, u = U$

For this type of flow,  $\frac{dp}{dx}$  does not exist

**OUR CENTERS :**

**KALYAN | DOMBIVLI | THANE | NERUL | DADAR**

**Contact - 9136008228**

From boundary condition,

From (i)  $\therefore B = 0$

From (ii)  $\therefore u = U$

This equation of velocity distribution is

$$u = \frac{y}{b} U$$

This equation is the general equation from Navier Stokes equation.

**Q 4) A) Using the laminar boundary layer velocity distribution:**

$$\frac{u}{U_\infty} = 2 \left(\frac{y}{\delta}\right) - 2 \left(\frac{y}{\delta}\right)^2 - \left(\frac{y}{\delta}\right)^4$$

(i) Check if boundary layer separation occurs.

(ii) Determine boundary layer thickness (in terms of Re) (10)

**Solution:**

Velocity profile,

$$\frac{u}{U_\infty} = 2 \left(\frac{y}{\delta}\right) - 2 \left(\frac{y}{\delta}\right)^2 - \left(\frac{y}{\delta}\right)^4$$

(i) Boundary layer thickness ( $\delta$ )

Shear stress by using Von-Karman equation

$$\tau_0 = \rho U^2 \frac{\partial \theta}{\partial x} \quad \dots(i)$$

But momentum thickness,

$$\begin{aligned} \theta &= \int_0^\delta \frac{u}{U} \left(1 - \frac{u}{U}\right) dy \\ &= \int_0^\delta \left[2 \left(\frac{y}{\delta}\right) - 2 \left(\frac{y}{\delta}\right)^2 - \left(\frac{y}{\delta}\right)^4\right] \left(1 - \frac{2y}{\delta} + \frac{2y^2}{\delta^2} + \frac{y^4}{\delta^4}\right) dy \\ &= \int_0^\delta \left[\frac{2y}{\delta} - \frac{4y^2}{\delta^2} + \frac{4y^3}{\delta^3} + \frac{2y^5}{\delta^5} - \frac{2y^2}{\delta^2} + \frac{4y^3}{\delta^3} - \frac{4y^4}{\delta^4} - \frac{2y^6}{\delta^6} - \frac{y^4}{\delta^4} + \frac{2y^5}{\delta^5} - \frac{2y^6}{\delta^6} - \frac{y^8}{\delta^8}\right] dy \\ &= \left[\frac{2y}{2\delta} - \frac{4y^3}{3\delta^2} + \frac{4y^4}{4\delta^3} + \frac{2y^6}{6\delta^5} - \frac{2y^3}{3\delta^2} + \frac{4y^4}{4\delta^3} - \frac{4y^5}{5\delta^4} - \frac{2y^7}{7\delta^6} - \frac{y^5}{5\delta^4} + \frac{2y^6}{6\delta^5} - \frac{2y^7}{7\delta^6} - \frac{y^9}{9\delta^8}\right]_0^\delta \\ &= \left[\delta - \frac{4}{3}\delta + \delta + \frac{1}{3}\delta - \frac{2}{3}\delta + \delta - \frac{4}{5}\delta - \frac{2}{7}\delta - \frac{1}{5}\delta + \frac{1}{3}\delta - \frac{2}{7}\delta - \frac{1}{9}\delta\right] \end{aligned}$$

**OUR CENTERS :**

**KALYAN | DOMBIVLI | THANE | NERUL | DADAR**

**Contact - 9136008228**

$$\theta = -\frac{1}{63} \delta$$

Put value of  $\theta$  in equation (i)

$$\tau_0 = \rho U^2 \frac{\partial}{\partial x} \left( -\frac{1}{63} \delta \right)$$

$$\tau_0 = -\frac{1}{63} \rho U^2 \frac{\partial \delta}{\partial x} \quad \dots(\text{ii})$$

Now, shear stress by using Newton's law of viscosity,

$$\tau_0 = \mu \left( \frac{du}{dx} \right)$$

$$\text{But } u = 2U \frac{y}{\delta} - \frac{6Uy^2}{\delta^2} - \frac{4Uy^4}{\delta^4}$$

Differentiating w.r.t.  $y$

$$\frac{du}{dx} = \frac{2U}{\delta} - \frac{4Uy}{\delta^2} - \frac{4Uy^4}{\delta^4}$$

At  $y = 0$

$$\left( \frac{du}{dx} \right)_{y=0} = \frac{2U}{\delta}$$

$$\tau_0 = \mu \left( \frac{2U}{\delta} \right) \quad \dots(\text{iii})$$

Equating the value of shear stress from equations (ii) and (iii),

$$-\frac{1}{63} \rho U^2 \frac{\partial \delta}{\partial x} = \frac{2U \mu}{\delta}$$
$$\delta \cdot \partial \delta = \frac{-126 \mu}{\rho U} \delta x$$

By integrating,

$$\int \delta \cdot \partial \delta = \frac{-126 \mu}{\rho U} \int \delta x$$

$$\frac{\delta^2}{2} = \frac{-126 \mu}{\rho U} \cdot x + c$$

Apply boundary condition

When  $y = 0$ ,  $\delta = 0$ ,  $\therefore c = 0$

**OUR CENTERS :**

**KALYAN | DOMBIVLI | THANE | NERUL | DADAR**

**Contact - 9136008228**

$$\frac{\delta^2}{2} = \frac{-126 \mu}{\rho U} \cdot x$$

$$\delta^2 = \frac{-126 \mu}{\rho U} \cdot \frac{x}{x}$$

$$\delta = 5.84x \cdot \sqrt{\frac{\mu}{\rho U}} \quad \therefore R_e = \frac{\rho U x}{\mu}$$

$$\delta = 5.84x \frac{x}{\sqrt{R_e}}$$


**Q 4) B) Derive Euler's equation of motion in Cartesian co-ordinate.**

**(10)**

**Solution:**

Euler's equation in Cartesian coordinates:

Consider an infinitely small mass of fluid enclosed in an elementary parallelepiped of sides  $dx$ ,  $dy$  and  $dz$  as shown in Fig. The motion of the fluid element is influenced by the following forces:

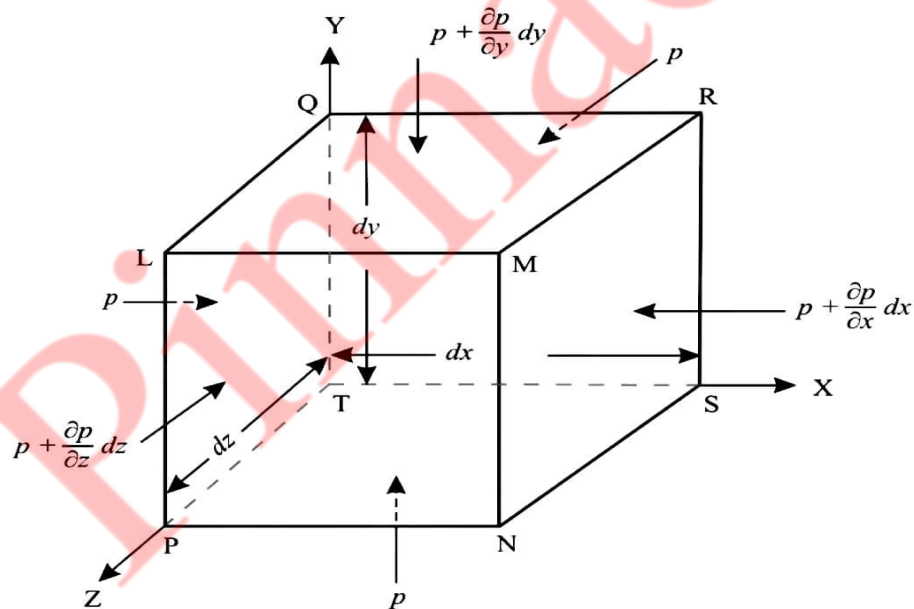

**FIG : NORMAL SURFACE FORCES ON A NON—VISCIOUS FLUID ELEMENTT**

(i) Normal forces due to pressure:

The intensities of hydrostatic pressure acting normal to each face of the parallelepiped are shown in Fig.

The net pressure force in the X-direction

**OUR CENTERS :**

**KALYAN | DOMBIVLI | THANE | NERUL | DADAR**

**Contact - 9136008228**

$$= p \cdot dy \cdot dz - \left( p + \frac{\partial p}{\partial x} dx \right) dy \cdot dz$$

$$= - \frac{\partial p}{\partial x} dx \cdot dy \cdot dz$$

(ii) Gravity or body force:

Let B be the body force per unit mass of fluid having components  $B_x$ ,  $B_y$  and  $B_z$  in the X, Y and Z directions respectively.

Then, the body force acting on the parallelepiped in the direction of X-coordinate is

$$= B_x \cdot \rho \cdot dx \cdot dy \cdot dz$$

(iii) Inertia forces:

The inertia force acting on the fluid mass, along the X-coordinate is given by,

$$\text{Mass} \times \text{acceleration} = \rho \cdot dx \cdot dy \cdot dz \cdot \frac{du}{dt}$$

As per Newton's second law of motion summation of forces acting in the fluid element in any direction equals the resulting inertia forces in that direction. Thus, along X-direction:

$$B_x \cdot \rho \cdot dx \cdot dy \cdot dz - \frac{\partial p}{\partial x} dx \cdot dy \cdot dz = \rho \cdot dx \cdot dy \cdot dz \cdot \frac{du}{dt}$$

Dividing both sides by  $\rho \cdot dx \cdot dy \cdot dz$ , we have:

$$B_x - \frac{1}{\rho} \frac{\partial p}{\partial x} = \frac{du}{dt} \quad \dots(i)$$

In this equation each term has dimensions of force per unit mass or acceleration. Obviously the total acceleration in a given direction is prescribed by the algebraic sum of the body force and the pressure gradient in that direction since the velocity components are functions of position and time, i.e.,  $u = f(x, y, z, t)$ , therefore, the total derivative of velocity  $u$  in the X-direction

can be written as:

$$= \frac{\partial u}{\partial t} dt + \frac{\partial u}{\partial x} dx + \frac{\partial u}{\partial y} dy + \frac{\partial u}{\partial z} dz$$

$$\frac{\partial u}{\partial t} = \frac{\partial u}{\partial t} + \frac{\partial u}{\partial x} \cdot \frac{\partial x}{\partial t} + \frac{\partial u}{\partial y} \cdot \frac{\partial y}{\partial t} + \frac{\partial u}{\partial z} \cdot \frac{\partial z}{\partial t}$$

Substituting,  $\frac{\partial x}{\partial t} = u$ ,  $\frac{\partial y}{\partial t} = v$  and  $\frac{\partial z}{\partial t} = w$ ; we have:

**OUR CENTERS :**

**KALYAN | DOMBIVLI | THANE | NERUL | DADAR**

**Contact - 9136008228**

$$\frac{\partial u}{\partial t} = \frac{\partial u}{\partial t} + u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} + w \frac{\partial u}{\partial z} \quad \dots(\text{ii})$$

Combining equation (i) and (ii), we get the force components as:

$$B_x - \frac{1}{\rho} \frac{\partial p}{\partial x} = \frac{\partial u}{\partial t} + u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} + w \frac{\partial u}{\partial z} \quad \dots(\text{iii})$$

Similarly,  $B_y - \frac{1}{\rho} \frac{\partial p}{\partial y} = \frac{\partial v}{\partial t} + u \frac{\partial v}{\partial x} + v \frac{\partial v}{\partial y} + w \frac{\partial v}{\partial z} \quad \dots(\text{iv})$

$$B_z - \frac{1}{\rho} \frac{\partial p}{\partial z} = \frac{\partial w}{\partial t} + u \frac{\partial w}{\partial x} + v \frac{\partial w}{\partial y} + w \frac{\partial w}{\partial z} \quad \dots(\text{iv})$$

For steady flow:  $\frac{\partial u}{\partial t} = \frac{\partial v}{\partial t} = \frac{\partial w}{\partial t} = 0$

Thus, the Euler's equation for a steady three-dimensional flow can be written as:

$$B_x - \frac{1}{\rho} \frac{\partial p}{\partial x} = \frac{\partial u}{\partial t} + u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} + w \frac{\partial u}{\partial z} \quad \dots(\text{vi})$$

$$B_y - \frac{1}{\rho} \frac{\partial p}{\partial y} = \frac{\partial v}{\partial t} + u \frac{\partial v}{\partial x} + v \frac{\partial v}{\partial y} + w \frac{\partial v}{\partial z} \quad \dots(\text{vii})$$

$$B_z - \frac{1}{\rho} \frac{\partial p}{\partial z} = \frac{\partial w}{\partial t} + u \frac{\partial w}{\partial x} + v \frac{\partial w}{\partial y} + w \frac{\partial w}{\partial z} \quad \dots(\text{viii})$$

In Euler's equation each term represents force per unit mass. Thus, if each equation is multiplied by the respective projections of the elementary displacement, the resulting equation would represent energy. Thus, in order to get total energy in the three-dimensional-steady-incompressible flow, the energy terms can be combined as follows:

$$B_x dx - \frac{1}{\rho} \frac{\partial p}{\partial x} dx = \frac{\partial u}{\partial t} dx + u \frac{\partial u}{\partial x} dx + v \frac{\partial u}{\partial y} dx + w \frac{\partial u}{\partial z} dx \quad \dots(\text{ix})$$

$$B_y dy - \frac{1}{\rho} \frac{\partial p}{\partial y} dy = \frac{\partial v}{\partial t} dy + u \frac{\partial v}{\partial x} dy + v \frac{\partial v}{\partial y} dy + w \frac{\partial v}{\partial z} dy \quad \dots(\text{x})$$

$$B_z dz - \frac{1}{\rho} \frac{\partial p}{\partial z} dz = \frac{\partial w}{\partial t} dz + u \frac{\partial w}{\partial x} dz + v \frac{\partial w}{\partial y} dz + w \frac{\partial w}{\partial z} dz \quad \dots(\text{xi})$$

From the equation of a stream line in a three-dimensional flow, we have:

$$\frac{dx}{u} = \frac{dy}{v} = \frac{dz}{w}$$

$$udy = vdx; vdz = wdy; udz = wdx$$

**OUR CENTERS :**

**KALYAN | DOMBIVLI | THANE | NERUL | DADAR**

**Contact - 9136008228**



Substituting these values in eqns. (ix), (x) and (xi), we get:

$$B_x dx - \frac{1}{\rho} \frac{\partial p}{\partial x} dx = u \frac{\partial u}{\partial x} dx + u \frac{\partial u}{\partial y} dy + u \frac{\partial u}{\partial z} dz \quad \dots(\text{xii})$$

$$B_y dy - \frac{1}{\rho} \frac{\partial p}{\partial x} dy = v \frac{\partial v}{\partial x} dx + v \frac{\partial v}{\partial y} dy + v \frac{\partial v}{\partial z} dz \quad \dots(\text{xii})$$

$$B_z dz - \frac{1}{\rho} \frac{\partial p}{\partial x} dz = w \frac{\partial w}{\partial x} dx + w \frac{\partial w}{\partial y} dy + w \frac{\partial w}{\partial z} dz \quad \dots(\text{xiii})$$

Acceleration terms are of form  $u \frac{\partial u}{\partial x}$  which can be replaced by  $\frac{1}{2} \frac{\partial(u^2)}{\partial x}$ . Thus,

$$B_x dx - \frac{1}{\rho} \frac{\partial p}{\partial x} dx = \frac{1}{2} \left[ \frac{\partial(u^2)}{\partial x} dx + \frac{\partial(u^2)}{\partial y} dy + \frac{\partial(u^2)}{\partial z} dz \right] = \frac{1}{2} \partial(u^2) \quad \dots(\text{xv})$$

$$B_y dy - \frac{1}{\rho} \frac{\partial p}{\partial x} dy = \frac{1}{2} \partial(v^2) \quad \dots(\text{xvi})$$

$$B_z dz - \frac{1}{\rho} \frac{\partial p}{\partial x} dz = \frac{1}{2} \partial(w^2) \quad \dots(\text{xvii})$$

Adding eqns. (xv), (xvi) and (xvii), we get:

$$\begin{aligned} B_x dx + B_y dy + B_z dz - \frac{1}{\rho} \left[ \frac{\partial p}{\partial x} dx + \frac{\partial p}{\partial y} dy + \frac{\partial p}{\partial z} dz \right] \\ = \frac{1}{2} [d(u^2) + d(v^2) + d(w^2)] \end{aligned}$$

$$B_x dx + B_y dy + B_z dz - \frac{1}{\rho} dp = \frac{1}{2} d(V^2) \quad \dots(\text{xviii})$$

Where,  $V = \text{Total velocity vector}$

When gravity is the only body force acting on the third element, then:

$$B_x = 0, B_z = 0 \text{ and } B_y = -g$$

$B_y = -g$  since the gravitational force acts in the downward direction which is negative 'with' respect to Y, Which is positive upward. Inserting these values in (xviii), we get:

$$-g - \frac{1}{\rho} dp = \frac{1}{2} d(V^2)$$

**OUR CENTERS :**

**KALYAN | DOMBIVLI | THANE | NERUL | DADAR**

**Contact - 9136008228**

$$-g - \frac{1}{\rho} dp = VDV$$

$$\frac{dp}{\rho} + VDV + g = 0$$

**Q 5) A) Air has a velocity of 1000 km/hr at pressure of 9.81 kN/ m<sup>2</sup> vacuum and a temperature of 47°C. Compute its stagnation properties (Pressure, Temperature and Density). Take atmospheric Pressure 98.1 kN/ m<sup>2</sup>, R= 287 J/kg °k and  $\gamma = 1.4$ . (10)**

**Solution:**

Velocity of air,  $V = 1000 \text{ km/hr} = 1000 \times \frac{5}{8} = 277.78 \text{ m/s}$

Pressure,  $p_1 = -9.81 \text{ kN/ m}^2$  (vacuum)

Temperature  $t_1 = 47^\circ\text{C} = 47 + 273 = 320 \text{ K}$

Atmospheric Pressure,  $p_{atm} = 98.1 \text{ kN/ m}^2$

$$R = 287 \text{ J/kg } ^\circ\text{k}, \gamma = 1.4$$

Pressure of air  $p_1 = p_{atm} + p_{gauge} = 98.1 + (-9.81) = 88.29 \text{ kN/ m}^2$

Velocity of sound  $C = \sqrt{\gamma RT} = \sqrt{1.4 \times 287 \times 320}$

$$C_1 = 358.6 \text{ m/s}$$

Mach number

$$M_1 = \frac{V_1}{C_1} = \frac{277.78}{358.6} = 0.775$$

Stagnation pressure

$$\begin{aligned} P_s &= P_1 \left( 1 + \left( \frac{\gamma-1}{2} M_1^2 \right) \right)^{\frac{\gamma}{\gamma-1}} \\ &= 88.29 \left( 1 + \left( \frac{1.4-1}{2} \times 0.775^2 \right) \right)^{\frac{1.4}{1.4-1}} \\ &= 131.27 \text{ kN/ m}^2 \end{aligned}$$

**OUR CENTERS :**

**KALYAN | DOMBIVLI | THANE | NERUL | DADAR**

**Contact - 9136008228**

Stagnation temperature  $T_s$

$$\begin{aligned}T_s &= T_1 \left( 1 + \left( \frac{\gamma-1}{2} \right) M_1^2 \right) \\&= 320 \left( 1 + \left( \frac{1.4-1}{2} \right) \times 0.775^2 \right) = 358.4 \text{ k} \\T_s &= 358.4 - 273 = 85.4^\circ\text{C}\end{aligned}$$

Stagnation density  $\rho_s$  :

$$\rho_s = \frac{\rho_s}{RT_s} = \frac{131.27}{287 \times 358.4} = 1.276 \text{ kg/m}^3$$

**Q 5) B) A flow has a velocity potential function is given by  $\phi = x^3 - 3xy^2$ . Verify whether it represents a valid flow field. If it does then determine the stream function. (10)**

**Solution:**

Velocity potential function,

(i) Velocity components in x and y direction

$$\begin{aligned}u &= -\frac{\partial \phi}{\partial x} - \frac{\partial}{\partial x} (x^3 - 3xy^2) = -(3x^2 - 3y^2) \\v &= -\frac{\partial \phi}{\partial y} - \frac{\partial}{\partial y} (x^3 - 3xy^2) = -(-6xy) = 6xy\end{aligned}$$

(ii) Check for continuous and irrotational flow

$$\begin{aligned}\frac{\partial u}{\partial x} &= \frac{\partial}{\partial x} (-3x^2 + 3y^2) = -6x, & \frac{\partial u}{\partial x} &= 6y \\ \frac{\partial v}{\partial y} &= \frac{\partial}{\partial y} (6xy) = 6x, & \frac{\partial v}{\partial y} &= 6y\end{aligned}$$

$$\text{Continuity equation, } \frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = -6x + 6x = 0$$

Flow is continuous,

For irrotational flow,

$$w_z = \frac{1}{2} \left[ \frac{\partial v}{\partial x} - \frac{\partial u}{\partial y} \right] = 0$$

**OUR CENTERS :**

**KALYAN | DOMBIVLI | THANE | NERUL | DADAR**

**Contact - 9136008228**

$$\frac{\partial u}{\partial x} = \frac{\partial v}{\partial y}, \quad \delta y = \delta y$$

The flow is irrotational.

**Q 6) A) Two reservoirs are connected by three pipes in series.**

F	Length	Diameter	f
1	500 m	30 cm	0.02
2	200 m	10 cm	0.025
3	100 mm	10 cm	0.03


Calculate the discharge through them if the elevation difference of the levels is in the reservoirs is 10 m considering minor losses. (10)

**Solution:**

Area of pipe

$$A_1 = \frac{\pi}{4} (d_1)^2 = A_1 = \frac{\pi}{4} (0.3)^2 = 0.0707 \text{ m}^2$$

$$A_2 = \frac{\pi}{4} (d_2)^2 = A_1 = \frac{\pi}{4} (0.1)^2 = 7.854 \times 10^{-3} \text{ m}^2$$

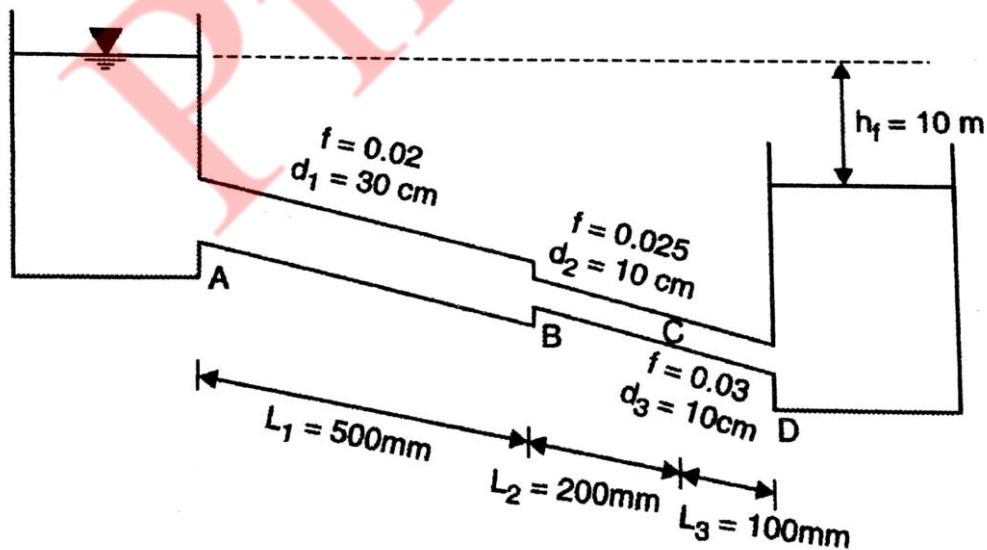

**OUR CENTERS :**

**KALYAN | DOMBIVLI | THANE | NERUL | DADAR**

**Contact - 9136008228**

Using continuity equation

$$Q = A_1 V_1 = A_2 V_2 = A_3 V_3$$

$$V_2 = \left(\frac{A_1}{A_2}\right) V_1$$
$$= \left(\frac{0.0707}{7.854 \times 10^{-3}}\right) V_1 = 9V_1$$

$$V_2 = V_3 = 9V_1$$

Head loss for pipe in series (neglecting minor losses)

$$h_f = h_{f1} + h_{f2} + h_{f3}$$

$$= \left(\frac{f l v^2}{2gd}\right)_1 + \left(\frac{f l v^2}{2gd}\right)_2 + \left(\frac{f l v^2}{2gd}\right)_3$$

$$= \frac{0.02 \times 500 V_1^2}{2 \times 9.81 \times 0.3} + \frac{0.025 \times 200 (9V_1)^2}{2 \times 9.81 \times 0.1} + \frac{0.03 \times 100 (9V_1)^2}{2 \times 9.81 \times 0.1}$$

$$= 1.699 V_1^2 + 206.42 V_1^2 + 123.85 V_1^2$$

$$10 = 331.97 V_1^2$$

$$V_1 = \sqrt{\frac{10}{331.97}} = 0.174$$

Discharge  $Q = A_1 V_1 = 0.0707 \times 0.174$

$$= 0.0123 \text{ m}^2/\text{s}$$

$$= 12.3 \text{ Lps.}$$

**Q 6) B) Write short notes: (Any two)**

**(10)**

**(I) Moody's diagram**


**Solution:**

(i) L.F moody's diagram is a graph plotted to find darcy – Weisbach friction factor for commercial pipe. The diagram is plotted in the form of frictional factor verses Reynold's number  $R_e$  curves for various value of relative roughness  $(R/k)$ .

**OUR CENTERS :**

**KALYAN | DOMBIVLI | THANE | NERUL | DADAR**

**Contact - 9136008228**

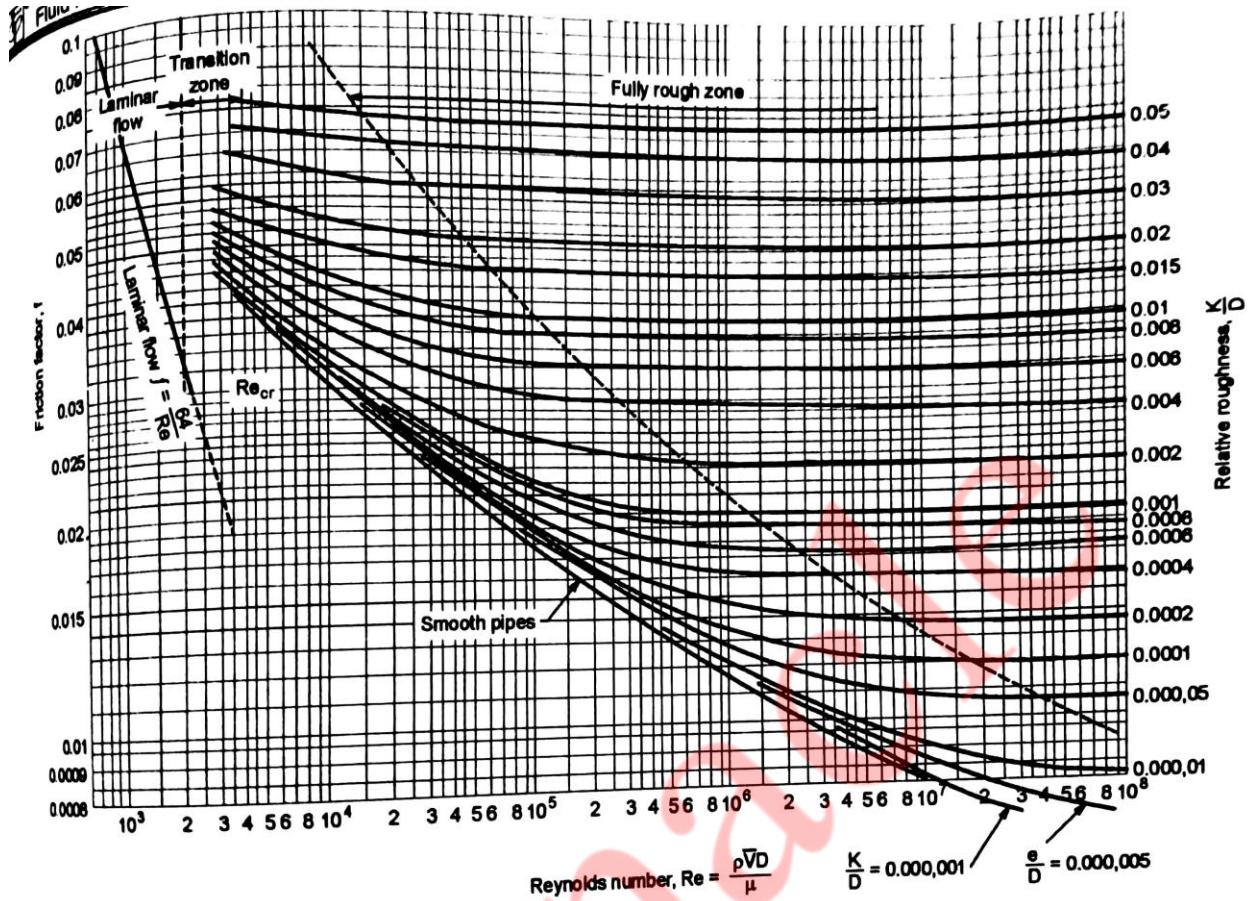

**FIG : MOODY'S CHART**

(ii) It is similar to Nikuradse's plot except for the transition regions. Moody's has plotted curve for equation,

$$\frac{1}{\sqrt{f}} - 2 \log_{10} \left( \frac{R}{k} \right) = 1.74 - 2 \log_{10} \left( 1 + \frac{R/k}{Re \sqrt{f}} 18.7 \right)$$

Which helps to determine friction factor  $f$  from the curve if the numerical values of  $\frac{R}{k}$  and  $Re$  of flow is known.

(iii) The value of equivalent sand grain roughness  $k$  is depends on the condition of material. As the pipe become older the roughness increase due to corrosion.

**(ii) Lift force on circulating cylinder in uniform flow.**

**Solution:**

A body wholly immersed in a real fluid may be subjected to following force due to relative motion between the body and the fluid as shown in fig. :

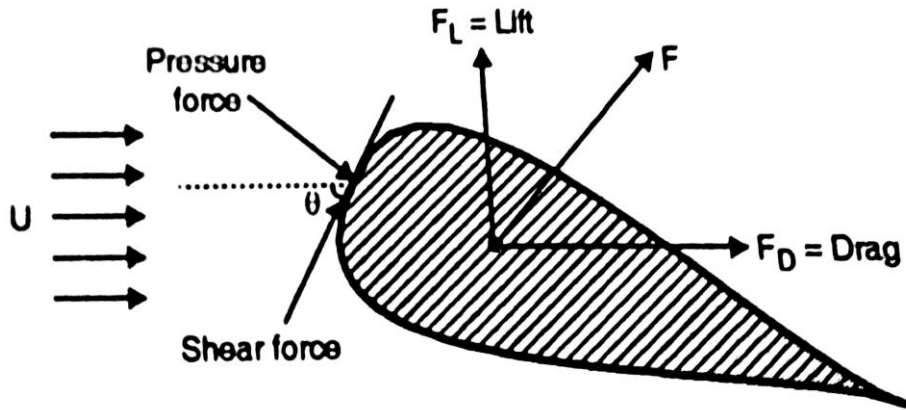


FIG : LIFT AND DRAG

- (i) Lift force: The component of force at right angles to the direction of flow is called the lift force,  $F_L$ .
- (ii) When a free stream approaches the body along the axis of symmetry, the force acting on the body is only the drag force, in the direction of flow and there is no lift force.
- (iii) The production of lift force requires asymmetric of flow, while drag force exists always.
- (iv) It is possible to create drag without lift but impossible to create lift without drag.
- (v) If the axis of the body is parallel to fluid flow, lift force is zero.

$$F_L = C_L \times \frac{1}{2} \rho U^2 \cdot A$$

**(iii) Compressible flow through convergent divergent nozzle.**


**Solution:**

- (i) Convergent – divergent nozzle is also known as laval nozzle.
- (ii) In this nozzle, subsonic flow induces in the converging section, critical or transonic conditions in the throat and supersonic flow in the diverging section.
- (iii) it is used to expand a flow from a given reservoir condition to a controlled back condition.

**OUR CENTERS :**

**KALYAN | DOMBIVLI | THANE | NERUL | DADAR**

**Contact - 9136008228**

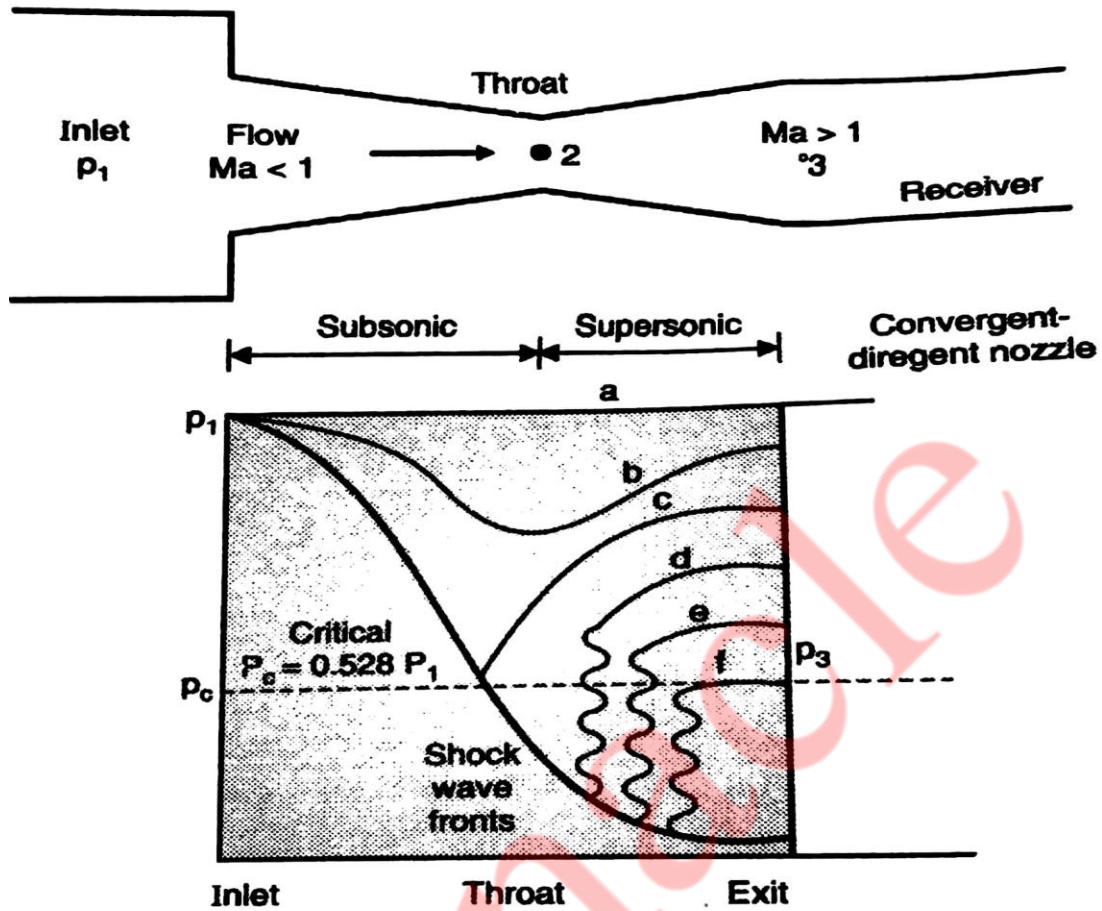

**FIG : CONVERGENT-DIVERGENT NOZZLE**

(iv) It is used to accelerate a hot, pressurized gas passing through it to a higher supersonic speed on the axial direction, by converting the heat energy of flow into kinetic energy.

(v) This laval nozzle is used in steam turbine and rocket engine nozzles.

**OUR CENTERS :**

**KALYAN | DOMBIVLI | THANE | NERUL | DADAR**

**Contact - 9136008228**